




OSG's Design & Technik, Made by OSG Germany

PLUS-LINE



INDEX

Square End mills



EPL-HP-4FL	PAGE 5-6
EPL-HP-5FL	PAGE 7
EPL-ETS	PAGE 8
EPL-HI-EMS	PAGE 9
EPL-HI-WEMS	PAGE 10
EPL-WRESF	PAGE 11
EPL-HI-CR-EMS	PAGE 12
EPL-HI-CR-WEMS	PAGE 13
EPL-SB-EBD	PAGE 14
EPL-SB-LN-EBD	PAGE 15
EPL-SB-EBM	PAGE 16
EPL-LN-EBD	PAGE 17
EPL-PC-EBD	PAGE 18
EPL-CPR	PAGE 19-20

INDEX

Ball Nose End mills

EPS-LN-EBD PAGE 21-22

EPS-CPR PAGE 23

For Graft

EPL-PC-EBD-DIA PAGE 24

EPL-CPR-DIA PAGE 25

For Aluminium

EPN-AL-3FS PAGE 27

EPA-AL-3FS PAGE 28

EPN-AL-3FL PAGE 29

EPA-AL-3FL PAGE 30



KEY FEATURES: EPL-HP-4FL



1 Unequal spacing, variable lead results in superior vibration suppression


2 Optimal flute shape for smooth evacuation of chips

3 Web taper: highly efficient milling due to increased rigidity


4 Weldon shank

EPL-HP-4FL NEW SIZES

Milling | Solid carbide

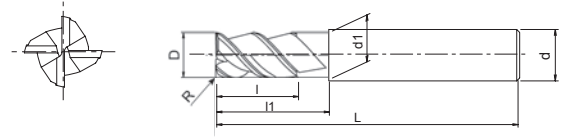

- Carbide end mill with WXL coating
- For general applications and exotic materials
- 4 flutes, variable helix and unequal spacing, corner radius
- Weldon shank




EDP	Z	D	R	L	l1	l	d1	d	Price
EP01930399	4	3	-	57	-	11	-	6	
EP01930300	4	3	0,25	57	-	11	-	6	
EP01930301	4	3	0,5	57	-	11	-	6	
EP01930499	4	4	-	57	-	11	-	6	
EP01930400	4	4	0,25	57	-	11	-	6	
EP01930401	4	4	0,5	57	-	11	-	6	
EP01930402	4	4	1	57	-	11	-	6	
EP01930599	4	5	-	57	-	13	-	6	
EP01930500	4	5	0,25	57	-	13	-	6	
EP01930501	4	5	0,5	57	-	13	-	6	
EP01930502	4	5	1	57	-	13	-	6	
EP01930699	4	6	-	57	20	13	5,8	6	
EP01930600	4	6	0,25	57	20	13	5,8	6	
EP01930601	4	6	0,5	57	20	13	5,8	6	
EP01930602	4	6	1	57	20	13	5,8	6	
EP01930603	4	6	1,5	57	20	13	5,8	6	
EP01930899	4	8	-	63	25	19	7,8	8	
EP01930800	4	8	0,25	63	25	19	7,8	8	
EP01930801	4	8	0,5	63	25	19	7,8	8	
EP01930802	4	8	1	63	25	19	7,8	8	
EP01930803	4	8	1,5	63	25	19	7,8	8	
EP01931099	4	10	-	72	30	22	9,8	10	
EP01931000	4	10	0,25	72	30	22	9,8	10	
EP01931001	4	10	0,5	72	30	22	9,8	10	
EP01931002	4	10	1	72	30	22	9,8	10	
EP01931003	4	10	1,5	72	30	22	9,8	10	
EP01931004	4	10	2	72	30	22	9,8	10	
EP01931006	4	10	3	72	30	22	9,8	10	
EP01931299	4	12	-	83	38	26	11,8	12	
EP01931200	4	12	0,25	83	38	26	11,8	12	
EP01931201	4	12	0,5	83	38	26	11,8	12	
EP01931202	4	12	1	83	38	26	11,8	12	
EP01931204	4	12	2	83	38	26	11,8	12	
EP01931206	4	12	3	83	38	26	11,8	12	
EP01931207	4	12	4	83	38	26	11,8	12	
EP01931499	4	14	-	83	38	26	13,8	14	
EP01931400	4	14	0,25	83	38	26	13,8	14	
EP01931402	4	14	1	83	38	26	13,8	14	
EP01931699	4	16	-	92	44	32	15,8	16	
EP01931600	4	16	0,25	92	44	32	15,8	16	
EP01931601	4	16	0,5	92	44	32	15,8	16	
EP01931602	4	16	1	92	44	32	15,8	16	
EP01931604	4	16	2	92	44	32	15,8	16	
EP01931606	4	16	3	92	44	32	15,8	16	
EP01931607	4	16	4	92	44	32	15,8	16	

Milling | Solid carbide




EPL-HP-4FL

Milling | Solid carbide

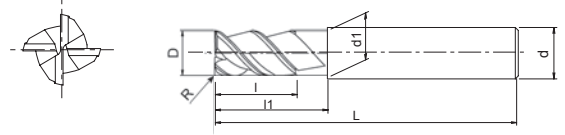

- Carbide end mill with WXL coating
- For general applications and exotic materials
- 4 flutes, variable helix and unequal spacing, corner radius
- Weldon shank




EDP	Z	D	R	L	l1	l	d1	d	Price
EP01932099	4	20	-	104	54	38	19,8	20	
EP01932000	4	20	0,25	104	54	38	19,8	20	
EP01932001	4	20	0,5	104	54	38	19,8	20	
EP01932002	4	20	1	104	54	38	19,8	20	
EP01932004	4	20	2	104	54	38	19,8	20	
EP01932006	4	20	3	104	54	38	19,8	20	
EP01932007	4	20	4	104	54	38	19,8	20	

Milling | Solid carbide

EPL-HP-5FL NEW SIZES

Milling | Solid carbide

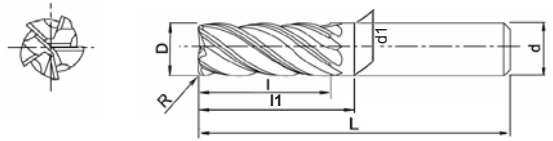

- Carbide end mill with WXL coating
- For general applications and exotic materials
- 5 flutes, variable helix and unequal spacing, corner radius
- Weldon shank




EDP	Z	D	R	L	l1	l	d1	d	Price
EP01940699	NEW	5	6	-	57	20	13	5,8	6
EP01940600	NEW	5	6	0,25	57	20	13	5,8	6
EP01940601	NEW	5	6	0,5	57	20	13	5,8	6
EP01940602	NEW	5	6	1	57	20	13	5,8	6
EP01940899		5	8	-	63	25	19	7,8	8
EP01940800		5	8	0,25	63	25	19	7,8	8
EP01940801		5	8	0,5	63	25	19	7,8	8
EP01940802		5	8	1	63	25	19	7,8	8
EP01940803		5	8	1,5	63	25	19	7,8	8
EP01941099		5	10	-	72	30	22	9,8	10
EP01941000		5	10	0,25	72	30	22	9,8	10
EP01941001		5	10	0,5	72	30	22	9,8	10
EP01941002		5	10	1	72	30	22	9,8	10
EP01941003		5	10	1,5	72	30	22	9,8	10
EP01941004		5	10	2	72	30	22	9,8	10
EP01941006		5	10	3	72	30	22	9,8	10
EP01941299		5	12	-	83	38	26	11,8	12
EP01941200		5	12	0,25	83	38	26	11,8	12
EP01941201		5	12	0,5	83	38	26	11,8	12
EP01941202		5	12	1	83	38	26	11,8	12
EP01941204		5	12	2	83	38	26	11,8	12
EP01941206		5	12	3	83	38	26	11,8	12
EP01941207		5	12	4	83	38	26	11,8	12
EP01941699		5	16	-	92	44	32	15,8	16
EP01941600		5	16	0,25	92	44	32	15,8	16
EP01941601		5	16	0,5	92	44	32	15,8	16
EP01941602		5	16	1	92	44	32	15,8	16
EP01941604		5	16	2	92	44	32	15,8	16
EP01941606		5	16	3	92	44	32	15,8	16
EP01941607		5	16	4	92	44	32	15,8	16
EP01942099		5	20	-	104	54	38	19,8	20
EP01942000		5	20	0,25	104	54	38	19,8	20
EP01942001		5	20	0,5	104	54	38	19,8	20
EP01942002		5	20	1	104	54	38	19,8	20
EP01942004		5	20	2	104	54	38	19,8	20
EP01942006		5	20	3	104	54	38	19,8	20
EP01942007		5	20	4	104	54	38	19,8	20

Milling | Solid carbide



EPL-ETS

Milling | Solid carbide



- Carbide end mill with TiAlN coating
- For general applications
- 3 flutes, square

Material compatibility icons: P (blue, ~45 HRC), P (blue, ~55 HRC), M (yellow, ~35 HRC), K (red, ~350 HB), N (green), S (orange), H (brown, ~60 HRC).

Product features icons: line Plus, VHM, TiAlN, four-quadrant pattern, 0~-0.02, 33°~37°.

Surface finish icon: P32.


EDP	Z	D	L	l	l1	d1	d	Price
EP01860400	3	4	57	6	8,4	4	6	
EP01860450	3	4,5	57	6,5	8,9	4,5	6	
EP01860500	3	5	57	7,5	9,9	5	6	
EP01860550	3	5,5	57	8,5	10,9	5,5	6	
EP01860600	3	6	57	9	21	5,7	6	
EP01860700	3	7	63	10,5	24	6,6	8	
EP01860800	3	8	63	12	27	7,6	8	
EP01860900	3	9	72	13,5	30	8,5	10	
EP01861000	3	10	72	15	32	9,5	10	
EP01861200	3	12	83	18	38	11,5	12	
EP01861600	3	16	92	24	44	15	16	

Milling | Solid carbide



EPL-HI-WEMS

Milling | Solid carbide

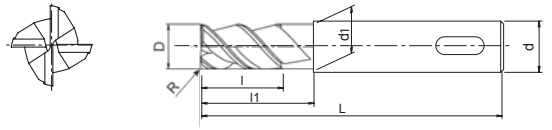

- Carbide end mill with TiAlN coating
- For general applications
- 4 flutes, variable helix and unequal spacing
- Weldon shank

Material compatibility icons: P (Blue, ~45 HRC), M (Yellow, ~35 HRC), K (Red, ~350 HB), N (Green, ~350 HB), S (Orange, ~350 HB).


Material and coating icons: Plus (line Plus logo), VHM (Variable Helix Method), TiAlN (coating), 35°~38° (flute angle), HB (Weldon Shank), and 0~0.02 (run-in chamfer).



EDP	Z	D	L	l	l1	d1	d	Price
EP01010400	4	4	57	11	-	-	6	
EP01010500	4	5	57	13	-	-	6	
EP01010600	4	6	57	13	20	5,8	6	
EP01010800	4	8	63	19	25	7,8	8	
EP01011000	4	10	72	22	30	9,8	10	
EP01011200	4	12	83	26	38	11,8	12	
EP01011600	4	16	92	32	45	15,8	16	
EP01012000	4	20	104	38	60	19,8	20	
EP01181000	4	10	100	40	60	9,8	10	
EP01181200	4	12	150	45	65	11,8	12	
EP01181600	4	16	150	65	100	15,8	16	
EP01182000	4	20	150	65	100	19,8	20	

EPL-HI-CR-EMS

Milling | Solid carbide



- Carbide end mill with TiAlN coating
- For general applications
- 4 flutes, variable helix and unequal spacing, corner radius




EDP	Z	D	R	L	l	l1	d	d2	Price
EP01760400	4	4	0,25	57	11	-	6	-	
EP01760401	4	4	0,5	57	11	-	6	-	
EP01760402	4	4	1	57	11	-	6	-	
EP01760500	4	5	0,25	57	13	-	6	-	
EP01760501	4	5	0,5	57	13	-	6	-	
EP01760600	4	6	0,25	57	13	20	6	5,8	
EP01760601	4	6	0,5	57	13	20	6	5,8	
EP01760602	4	6	1	57	13	20	6	5,8	
EP01760603	4	6	1,5	57	13	20	6	5,8	
EP01760800	4	8	0,25	63	19	25	8	7,8	
EP01760801	4	8	0,5	63	19	25	8	7,8	
EP01760802	4	8	1	63	19	25	8	7,8	
EP01760803	4	8	1,5	63	19	25	8	7,8	
EP01761000	4	10	0,25	72	22	30	10	9,8	
EP01761001	4	10	0,5	72	22	30	10	9,8	
EP01761002	4	10	1	72	22	30	10	9,8	
EP01761003	4	10	2	72	22	30	10	9,8	
EP01761200	4	12	0,25	83	26	38	12	11,8	
EP01761201	4	12	0,5	83	26	38	12	11,8	
EP01761202	4	12	1	83	26	38	12	11,8	
EP01761203	4	12	2	83	26	38	12	11,8	
EP01761600	4	16	0,25	92	32	45	16	15,8	
EP01761601	4	16	1	92	32	45	16	15,8	
EP01761602	4	16	2	92	32	45	16	15,8	

Milling | Solid carbide

EPL-HI-CR-WEMS

Milling | Solid carbide

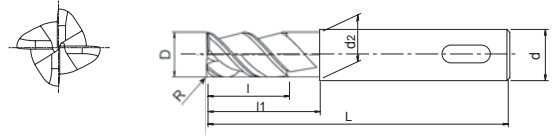

- Carbide end mill with TiAlN coating
- For general applications
- 4 flutes, variable helix and unequal spacing, corner radius
- Weldon shank




EDP	Z	D	R	L	l	l1	d	d2	Price
EP01020400	4	4	0,25	57	11	-	6	-	
EP01020401	4	4	0,5	57	11	-	6	-	
EP01020402	4	4	1	57	11	-	6	-	
EP01020500	4	5	0,25	57	13	-	6	-	
EP01020501	4	5	0,5	57	13	-	6	-	
EP01020502	4	5	1	57	13	20	6	5,8	
EP01020600	4	6	0,25	57	13	20	6	5,8	
EP01020601	4	6	0,5	57	13	20	6	5,8	
EP01020602	4	6	1	57	13	20	6	5,8	
EP01020603	4	6	1,5	63	19	25	6	7,8	
EP01020800	4	8	0,25	63	19	25	8	7,8	
EP01020801	4	8	0,5	63	19	25	8	7,8	
EP01020802	4	8	1	63	19	25	8	7,8	
EP01020803	4	8	1,5	72	22	30	8	9,8	
EP01021000	4	10	0,25	72	22	30	10	9,8	
EP01021001	4	10	0,5	72	22	30	10	9,8	
EP01021002	4	10	1	72	22	30	10	9,8	
EP01021003	4	10	1,5	83	26	38	10	11,8	
EP01021004	4	10	2	83	26	38	10	11,8	
EP01021200	4	12	0,25	83	26	38	12	11,8	
EP01021201	4	12	0,5	83	26	38	12	11,8	
EP01021202	4	12	1	83	26	38	12	15,8	
EP01021203	4	12	2	83	26	38	12	15,8	
EP01021600	4	16	0,25	92	32	44	16	15,8	
EP01021601	4	16	1	92	32	44	16	15,8	
EP01021602	4	16	2	92	32	44	16	15,8	
EP01022000	4	20	1	104	38	54	20	19,8	
EP01022001	4	20	2	104	38	54	20	19,8	

Milling | Solid carbide



EPL-SB-EBM

Milling | Solid carbide

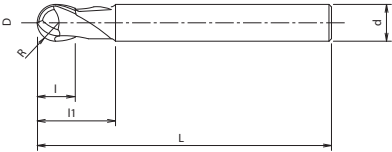

- Carbide end mill with TiAlN coating
- For general applications
- 4 flutes, ball nose

Material compatibility icons: P (blue), P (light blue), M (yellow), K (red), N (green), S (orange), H (grey). Below each icon is a hardness specification: ~45 HRC, ~55 HRC, ~35 HRC, ~350 HB, and ~60 HRC.

Technical specifications icons: line Plus, VHM, WXS, 30°, R ±0.005, and a gauge icon labeled P36.


EDP	Z	D	R	L	I	I1	d	Price
EP01160400	4	4	2	50	5	12	4	
EP01160500	4	5	2,5	57	6	15	6	
EP01160600	4	6	3	57	7	18	6	
EP01160800	4	8	4	63	9	24	8	
EP01161000	4	10	5	72	11	30	10	
EP01161200	4	12	6	80	13	36	12	

Milling | Solid carbide




EPL-LN-EBD

Milling | Solid carbide

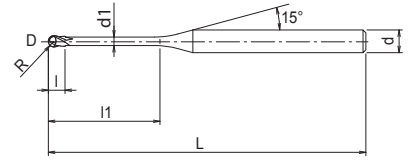

- Carbide end mill with TiAlN coating
- For general applications
- 2 flutes, long neck, ball nose




EDP	Z	D	R	l1	L	l	d	d1	Øk	Le (α) 0,5°	Le (α) 1°	Le (α) 1,5°	Le (α) 2°	Le (α) 2,5°	Le (α) 3°	Price
EP48165001	2	0,3	0,15	0,5	45	0,28	0,24	4	14,22	0,52	0,54	0,56	0,58	0,6	0,62	
EP48165002	2	0,3	0,15	1	45	0,28	0,24	4	13,34	1,05	1,09	1,12	1,16	1,2	1,24	
EP48165003	2	0,4	0,2	1	45	0,37	0,3	4	13,39	1,04	1,07	1,11	1,14	1,18	1,22	
EP48165004	2	0,4	0,2	2	45	0,37	0,3	4	11,88	2,08	2,14	2,21	2,29	2,37	2,46	
EP48165005	2	0,5	0,25	1	45	0,45	0,4	4	13,45	1,03	1,06	1,09	1,12	1,15	1,19	
EP48165006	2	0,5	0,25	2	45	0,45	0,4	4	11,89	2,06	2,13	2,2	2,27	2,35	2,43	
EP48165007	2	0,5	0,25	3	45	0,45	0,4	4	10,65	3,1	3,2	3,3	3,42	3,54	3,68	
EP48165008	2	0,5	0,25	4	45	0,45	0,5	4	9,64	4,13	4,27	4,41	4,57	4,74	4,92	
EP48165009	2	0,6	0,3	1	45	0,55	0,5	4	13,49	1,03	1,05	1,08	1,11	1,14	1,18	
EP48165010	2	0,6	0,3	2	45	0,55	0,5	4	11,88	2,06	2,12	2,19	2,26	2,34	2,42	
EP48165011	2	0,6	0,3	3	45	0,55	0,5	4	10,61	3,1	3,19	3,3	3,41	3,53	3,66	
EP48165012	2	0,6	0,3	4	45	0,55	0,5	4	9,58	4,13	4,26	4,41	4,56	4,73	4,91	
EP48165013	2	0,6	0,3	6	45	0,55	0,5	4	8,02	6,2	6,4	6,62	6,86	7,12	7,39	
EP48165014	2	0,8	0,4	2	45	0,75	0,6	4	11,86	2,06	2,12	2,18	2,25	2,32	2,4	
EP48165015	2	0,8	0,4	4	45	0,75	0,6	4	9,45	4,13	4,26	4,4	4,55	4,71	4,88	
EP48165016	2	0,8	0,4	6	45	0,75	0,6	4	7,85	6,19	6,4	6,61	6,85	7,1	7,37	
EP48165017	2	1	0,5	2,5	45	0,95	0,8	4	11,09	2,57	2,64	2,72	2,81	2,9	3	
EP48165018	2	1	0,5	3	45	0,95	0,8	4	10,43	3,09	3,18	3,28	3,38	3,49	3,62	
EP48165019	2	1	0,5	4	45	0,95	0,8	4	9,32	4,12	4,25	4,39	4,53	4,69	4,86	
EP48165020	2	1	0,5	5	45	0,95	0,8	4	8,41	5,16	5,32	5,49	5,68	5,88	6,1	
EP48165021	2	1	0,5	6	45	0,95	0,8	4	7,67	6,19	6,39	6,6	6,83	7,08	7,35	
EP48165022	2	1	0,5	8	45	0,95	0,8	4	6,52	8,26	8,53	8,82	9,13	9,47	9,83	
EP48165023	2	1	0,5	10	45	0,95	0,8	4	5,66	10,33	10,67	11,04	11,43	11,86	12,32	
EP48165024	2	1	0,5	12	45	0,95	0,8	4	5,01	12,39	12,81	13,25	13,73	14,25	14,81	
EP48165025	2	1,5	0,75	4	45	1,45	1,2	4	8,8	4,18	4,33	4,46	4,6	4,75	4,92	
EP48165026	2	1,5	0,75	8	45	1,45	1,2	4	5,92	8,34	8,61	8,9	9,2	9,53	9,89	
EP48165027	2	2	1	6	45	1,95	1,6	4	6,19	6,36	6,67	6,96	7,23	7,49	7,76	
EP48165028	2	2	1	8	45	1,95	1,6	4	5,1	8,48	8,87	9,22	9,55	9,88	10,24	
EP48165029	2	2	1	10	45	1,95	1,6	4	4,33	10,59	11,05	11,45	11,85	12,27	12,73	
EP48165030	2	2	1	12	45	1,95	1,6	4	3,77	12,69	13,21	13,67	14,15	14,66	15,22	
EP48165031	2	2	1	14	50	1,95	1,6	4	3,33	14,78	15,36	15,89	16,45	17,05	17,7	
EP48165032	2	2	1	16	50	1,95	1,6	4	2,98	16,88	17,51	18,1	18,75	19,44	-	
EP48165033	2	2	1	20	55	1,95	1,6	4	2,47	21,05	21,78	22,54	23,34	-	-	
EP48165034	2	2	1	25	65	1,95	1,6	4	2,03	26,24	27,13	28,08	29,09	-	-	
EP48165035	2	3	1,5	8	50	2,85	2,4	6	6,88	8,35	8,67	8,97	9,25	9,55	9,88	
EP48165036	2	3	1,5	10	50	2,85	2,4	6	5,94	10,44	10,83	11,19	11,55	11,94	12,37	
EP48165037	2	3	1,5	16	55	2,85	2,4	6	4,21	16,7	17,26	17,84	18,45	19,11	19,83	
EP48165038	2	3	1,5	20	60	2,85	2,4	6	3,52	20,86	21,54	22,27	23,05	23,89	24,8	
EP48165039	2	4	2	10	60	3,85	3,2	6	4,74	10,42	10,79	11,13	11,48	11,85	12,25	
EP48165040	2	4	2	16	60	3,85	3,2	6	3,18	16,68	17,23	17,78	18,38	19,02	19,71	
EP48165041	2	4	2	20	65	3,85	3,2	6	2,6	20,84	21,51	22,22	22,98	23,8	-	
EP48165042	2	4	2	25	70	3,85	3,2	6	2,12	26,02	26,86	27,76	28,72	-	-	
EP48165043	2	4	2	30	80	3,85	3,2	6	1,79	31,19	32,21	33,3	-	-	-	
EP48165044	2	6	3	10	60	5,85	6	6	-	-	-	-	-	-	-	
EP48165045	2	6	3	12	60	5,85	6	6	-	-	-	-	-	-	-	
EP48165046	2	6	3	20	70	5,85	6	6	-	-	-	-	-	-	-	
EP48165047	2	6	3	30	80	5,85	6	6	-	-	-	-	-	-	-	

Milling | Solid carbide



EPL-PC-EBD

Milling | Solid carbide

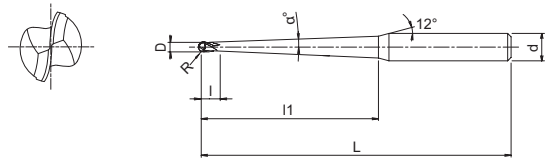

- Carbide end mill with TiAlN coating
- For general applications
- 2 flutes, pencil neck, ball nose




EDP	Z	D	R	α	L	l	l1	d	Price
W0900958	2	1	0,5	0,9	55	3	10	6	
W0900959	2	1	0,5	0,9	60	3	15	6	
W0900960	2	1	0,5	0,9	65	3	20	6	
W0900962	2	1,5	0,75	0,9	65	4	20	6	
W0900963	2	1,5	0,75	0,9	70	4	30	6	
W0900988	2	1,5	0,75	1,4	65	4	20	6	
W0900964	2	2	1	0,9	65	6	20	6	
W0900965	2	2	1	0,9	70	6	30	6	
W0900989	2	2	1	1,4	65	6	20	6	
W0900990	2	2	1	1,4	70	6	30	6	
W0900991	2	2	1	1,4	80	6	40	6	
W0900967	2	3	1,5	0,9	65	8	20	6	
W0900968	2	3	1,5	0,9	70	8	30	6	
W0900969	2	3	1,5	0,9	80	8	40	6	
W0900992	2	3	1,5	1,4	65	8	20	6	
W0900993	2	3	1,5	1,4	70	8	30	6	
W0900994	2	3	1,5	1,4	80	8	40	6	
W0900971	2	4	2	0,9	90	10	30	8	
W0900972	2	4	2	0,9	100	10	40	8	
W0900973	2	4	2	0,9	120	10	50	8	
W0900974	2	4	2	0,9	120	10	60	8	
W0900975	2	4	2	0,9	130	10	70	8	
W0900995	2	4	2	1,4	100	10	40	8	
W0900996	2	4	2	1,4	120	10	50	8	
W0900997	2	4	2	1,4	120	10	60	8	
W0900978	2	6	3	0,9	120	12	50	10	
W0900979	2	6	3	0,9	120	12	60	10	
W0900980	2	6	3	0,9	130	12	70	10	
W0900981	2	6	3	0,9	130	12	80	10	
W0900998	2	6	3	1,4	120	12	60	10	
W0900984	2	8	4	0,9	150	20	60	10	
W0900985	2	8	4	0,9	150	20	80	10	
W0900999	2	8	4	1,4	150	20	60	12	
W0901000	2	8	4	1,4	150	20	80	12	

Milling | Solid carbide



EPL-CPR

Milling | Solid carbide

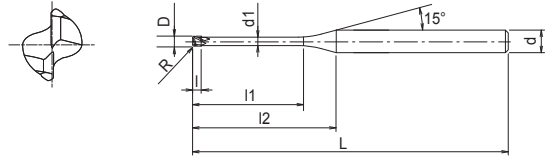

- Carbide end mill with WXL coating
- For general applications
- 2 flutes, long neck, corner radius




EDP	Z	D	R	l1	d	d1	l	L	Price
EP48166001	2	1	0,1	4	4	0,95	0,8	50	
EP48166002	2	1	0,1	6	4	0,95	0,8	50	
EP48166003	2	1	0,1	8	4	0,95	0,8	50	
EP48166004	2	1	0,2	4	4	0,95	0,8	50	
EP48166005	2	1	0,2	6	4	0,95	0,8	50	
EP48166006	2	1	0,2	8	4	0,95	0,8	50	
EP48166007	2	1	0,2	10	4	0,95	0,8	50	
EP48166008	2	1	0,3	4	4	0,95	0,8	50	
EP48166009	2	1	0,3	6	4	0,95	0,8	50	
EP48166010	2	1	0,3	8	4	0,95	0,8	50	
EP48166011	2	1	0,3	10	4	0,95	0,8	50	
EP48166012	2	2	0,2	6	4	1,95	1,6	50	
EP48166013	2	2	0,2	8	4	1,95	1,6	50	
EP48166014	2	2	0,2	10	4	1,95	1,6	50	
EP48166015	2	2	0,2	12	4	1,95	1,6	50	
EP48166016	2	2	0,2	16	4	1,95	1,6	50	
EP48166017	2	2	0,5	6	4	1,95	1,6	50	
EP48166018	2	2	0,5	8	4	1,95	1,6	50	
EP48166019	2	2	0,5	10	4	1,95	1,6	50	
EP48166020	2	2	0,5	12	4	1,95	1,6	50	
EP48166021	2	2	0,5	16	4	1,95	1,6	50	
EP48166022	2	3	0,2	6	6	2,85	2,5	60	
EP48166023	2	3	0,2	8	6	2,85	2,5	60	
EP48166024	2	3	0,2	10	6	2,85	2,5	60	
EP48166025	2	3	0,2	12	6	2,85	2,5	60	
EP48166026	2	3	0,2	16	6	2,85	2,5	60	
EP48166027	2	3	0,5	6	6	2,85	2,5	60	
EP48166028	2	3	0,5	8	6	2,85	2,5	60	
EP48166029	2	3	0,5	10	6	2,85	2,5	60	
EP48166030	2	3	0,5	12	6	2,85	2,5	60	
EP48166031	2	3	0,5	16	6	2,85	2,5	60	
EP48166032	4	4	0,5	12	6	3,85	4	60	
EP48166033	4	4	0,5	16	6	3,85	4	60	
EP48166034	4	4	0,5	20	6	3,85	4	60	
EP48166035	4	4	1	10	6	3,85	4	60	
EP48166036	4	4	1	12	6	3,85	4	60	
EP48166037	4	4	1	16	6	3,85	4	60	
EP48166038	4	4	1	20	6	3,85	4	60	
EP48166039	4	6	0,5	12	6	5,85	6	70	
EP48166040	4	6	0,5	16	6	5,85	6	70	
EP48166041	4	6	0,5	20	6	5,85	6	70	
EP48166042	4	6	0,5	25	6	5,85	6	70	

Milling | Solid carbide



EPL-CPR

Milling | Solid carbide

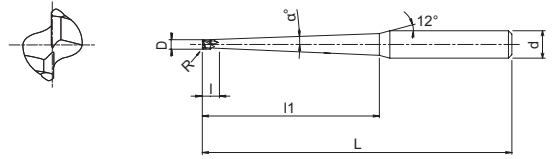

- Carbide end mill with WXL coating
- For general applications
- 2 flutes, long neck, corner radius




EDP	Z	D	R	α	L	l	l1	d	Price
W0901001	2	2	0,5	0,9	65	6	20	6	
W0901002	2	2	0,5	0,9	70	6	30	6	
W0901003	2	3	0,5	0,9	65	8	20	6	
W0901004	2	3	0,5	0,9	70	8	30	6	
W0901005	2	3	0,5	0,9	80	8	40	6	
W0901034	2	3	0,5	1,4	65	8	20	6	
W0901035	2	3	0,5	1,4	70	8	30	6	
W0901036	2	3	1	1,4	65	8	20	6	
W0901037	2	3	1	1,4	70	8	30	6	
W0901038	2	3	1	1,4	80	8	40	6	
W0901006	2	3	1	0,9	65	8	20	6	
W0901007	2	3	1	0,9	70	8	30	6	
W0901008	2	3	1	0,9	80	8	40	6	
W0901009	2	4	0,5	0,9	90	10	30	8	
W0901010	2	4	0,5	0,9	100	10	40	8	
W0901011	2	4	0,5	0,9	120	10	50	8	
W0901039	2	4	0,5	1,4	100	10	30	8	
W0901040	2	4	0,5	1,4	100	10	40	8	
W0901041	2	4	1	1,4	100	10	30	8	
W0901042	2	4	1	1,4	100	10	40	8	
W0901012	2	4	1	0,9	90	10	30	8	
W0901013	2	4	1	0,9	100	10	40	8	
W0901014	2	4	1	0,9	120	10	50	8	
W0901015	2	4	1	0,9	120	10	60	8	
W0901018	2	6	0,5	0,9	120	12	50	10	
W0901019	2	6	0,5	0,9	120	12	60	10	
W0901020	2	6	0,5	0,9	130	12	70	10	
W0901021	2	6	1	0,9	120	12	50	10	
W0901022	2	6	1	0,9	120	12	60	10	
W0901023	2	6	1	0,9	130	12	70	10	
W0901024	2	6	1	0,9	130	12	80	10	
W0901027	2	8	0,5	0,9	150	20	60	10	
W0901028	2	8	0,5	0,9	150	20	80	10	
W0901029	2	8	1	0,9	150	20	60	10	
W0901030	2	8	1	0,9	150	20	80	10	
W0901033	2	8	2	0,9	150	20	80	10	

Milling | Solid carbide




EPS-LN-EBD

Milling | Solid carbide

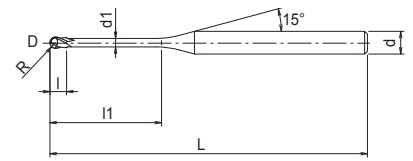

- Carbide end mill with WXS coating
- For hardened steels up to 65 HRC and stainless steels
- 2 flutes, long neck, ball nose




EDP	Z	D	R	l1	L	l	d	d1	θk	Le (α) 0,5°	Le (α) 1°	Le (α) 1,5°	Le (α) 2°	Le (α) 2,5°	Le (α) 3°	Price
EP01950001	2	0,3	0,15	0,6	45	0,16	4	0,28	14,03°	0,63	0,65	0,68	0,7	0,72	0,75	
EP01950002	2	0,3	0,15	1	45	0,24	4	0,28	13,34°	1,05	1,09	1,12	1,16	1,2	1,24	
EP01950003	2	0,3	0,15	1,5	45	0,24	4	0,28	12,57°	1,57	1,63	1,68	1,74	1,8	1,87	
EP01950101	2	0,4	0,2	0,8	45	0,3	4	0,37	13,74°	0,83	0,86	0,88	0,91	0,94	0,97	
EP01950102	2	0,4	0,2	1	45	0,3	4	0,37	13,39°	1,04	1,07	1,11	1,14	1,18	1,22	
EP01950103	2	0,4	0,2	1,5	45	0,3	4	0,37	12,59°	1,56	1,61	1,66	1,72	1,77	1,84	
EP01950104	2	0,4	0,2	2	45	0,3	4	0,37	11,88°	2,08	2,14	2,21	2,29	2,37	2,46	
EP01950201	2	0,5	0,25	1	45	0,4	4	0,45	13,45°	1,03	1,06	1,09	1,12	1,15	1,19	
EP01950202	2	0,5	0,25	1,5	45	0,4	4	0,45	12,62°	1,55	1,59	1,64	1,69	1,75	1,81	
EP01950203	2	0,5	0,25	2	45	0,4	4	0,45	11,89°	2,06	2,13	2,2	2,27	2,35	2,43	
EP01950204	2	0,5	0,25	2,5	45	0,4	4	0,45	11,23°	2,58	2,66	2,75	2,84	2,94	3,05	
EP01950205	2	0,5	0,25	3,5	45	0,4	4	0,45	10,12°	3,61	3,73	3,86	3,99	4,14	4,3	
EP01950206	2	0,5	0,25	4	45	0,4	4	0,45	9,64°	4,13	4,27	4,41	4,57	4,74	4,92	
EP01950207	2	0,5	0,25	6	45	0,4	4	0,45	8,1°	6,2	6,41	6,63	6,87	7,13	7,41	
EP01950301	2	0,6	0,3	1,2	45	0,5	4	0,55	13,14°	1,24	1,27	1,3	1,34	1,38	1,43	
EP01950302	2	0,6	0,3	2	45	0,5	4	0,55	11,88°	2,06	2,12	2,19	2,26	2,34	2,42	
EP01950303	2	0,6	0,3	3	45	0,5	4	0,55	10,61°	3,1	3,19	3,3	3,41	3,53	3,66	
EP01950304	2	0,6	0,3	4	45	0,5	4	0,55	9,58°	4,13	4,26	4,41	4,56	4,73	4,91	
EP01950305	2	0,6	0,3	5	45	0,5	4	0,55	8,73°	5,16	5,33	5,51	5,71	5,92	6,15	
EP01950401	2	0,8	0,4	2	45	0,6	4	0,75	11,86°	2,06	2,12	2,18	2,25	2,32	2,4	
EP01950402	2	0,8	0,4	3	45	0,6	4	0,75	10,52°	3,09	3,19	3,29	3,4	3,51	3,64	
EP01950403	2	0,8	0,4	4	45	0,6	4	0,75	9,45°	4,13	4,26	4,4	4,55	4,71	4,88	
EP01950404	2	0,8	0,4	5	45	0,6	4	0,75	8,58°	5,16	5,33	5,5	5,7	5,9	6,13	
EP01950501	2	1	0,5	2	45	0,8	4	0,95	11,84°	2,06	2,11	2,17	2,23	2,3	2,37	
EP01950502	2	1	0,5	3	45	0,8	4	0,95	10,43°	3,09	3,18	3,28	3,38	3,49	3,62	
EP01950503	2	1	0,5	4	45	0,8	4	0,95	9,32°	4,12	4,25	4,39	4,53	4,69	4,86	
EP01950504	2	1	0,5	6	45	0,8	4	0,95	7,67°	6,19	6,39	6,6	6,83	7,08	7,35	
EP01950505	2	1	0,5	8	45	0,8	4	0,95	6,52°	8,26	8,53	8,82	9,13	9,47	9,83	
EP01950506	2	1	0,5	10	45	0,8	4	0,95	5,66°	10,33	10,67	11,04	11,43	11,86	12,32	
EP01950507	2	1	0,5	12	45	0,8	4	0,95	5,01°	12,39	12,81	13,25	13,73	14,25	14,81	
EP01950601	2	1,5	0,75	3	45	1,2	4	1,45	10,01°	3,13	3,25	3,35	3,45	3,56	3,67	
EP01950602	2	1,5	0,75	4	45	1,2	4	1,45	8,8°	4,18	4,33	4,46	4,6	4,75	4,92	
EP01950603	2	1,5	0,75	6	45	1,2	4	1,45	7,08°	6,27	6,47	6,68	6,9	7,14	7,4	
EP01950604	2	1,5	0,75	8	45	1,2	4	1,45	5,92°	8,34	8,61	8,9	9,2	9,53	9,89	
EP01950605	2	1,5	0,75	12	45	1,2	4	1,45	4,46°	12,48	12,89	13,33	13,8	14,31	14,86	
EP01950701	2	2	1	4	45	1,6	4	1,95	7,87°	4,18	4,33	4,46	4,6	4,75	4,92	
EP01950702	2	2	1	6	45	1,6	4	1,95	6,19°	6,27	6,47	6,68	6,9	7,14	7,4	
EP01950703	2	2	1	8	45	1,6	4	1,95	5,1°	8,34	8,61	8,9	9,2	9,53	9,89	
EP01950704	2	2	1	10	45	1,6	4	1,95	4,33°	10,41	10,75	11,11	11,5	11,92	12,38	
EP01950705	2	2	1	12	45	1,6	4	1,95	3,77°	12,48	12,89	13,33	13,8	14,31	14,86	
EP01950706	2	2	1	14	50	1,6	4	1,95	3,33°	14,55	15,03	15,55	16,1	16,7	17,35	
EP01950707	2	2	1	16	50	1,6	4	1,95	2,98°	16,62	17,17	17,76	18,4	19,09	19,83	
EP01950801	2	2,5	1,25	10	45	2	4	2,35	3,63°	10,46	10,85	11,21	11,59	11,99	12,43	
EP01950901	2	3	1,5	6	50	2,4	6	2,85	8,17°	6,25	6,49	6,72	6,95	7,17	7,4	
EP01950902	2	3	1,5	8	50	2,4	6	2,85	6,88°	8,35	8,67	8,97	9,25	9,55	9,88	

Milling | Solid carbide




EPS-LN-EBD

Milling | Solid carbide

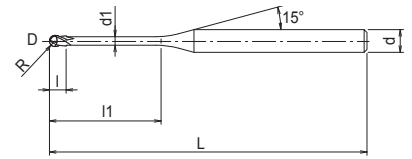

- Carbide end mill with WXS coating
- For hardened steels up to 65 HRC and stainless steels
- 2 flutes, long neck, ball nose




EDP	Z	D	R	l1	L	l	d	d1	θk	Le (α) 0,5°	Le (α) 1°	Le (α) 1,5°	Le (α) 2°	Le (α) 2,5°	Le (α) 3°	Price
EP01950903	2	3	1,5	10	50	2,4	6	2,85	5,94°	10,44	10,83	11,19	11,55	11,94	12,37	
EP01950904	2	3	1,5	12	55	2,4	6	2,85	5,22°	12,53	12,98	13,4	13,85	14,33	14,86	
EP01950905	2	3	1,5	15	55	2,4	6	2,85	4,42°	15,66	16,2	16,73	17,3	17,92	18,59	
EP01950906	2	3	1,5	16	55	2,4	6	2,85	4,21°	16,7	17,26	17,84	18,45	19,11	19,83	
EP01950907	2	3	1,5	20	60	2,4	6	2,85	3,52°	20,86	21,54	22,27	23,05	23,89	24,8	
EP01951001	2	4	2	8	55	3,2	6	3,85	5,67°	8,33	8,63	8,91	9,18	9,46	9,77	
EP01951002	2	4	2	10	60	3,2	6	3,85	4,74°	10,42	10,79	11,13	11,48	11,85	12,25	
EP01951003	2	4	2	12	60	3,2	6	3,85	4,07°	12,51	12,95	13,35	13,78	14,24	14,74	
EP01951004	2	4	2	16	60	3,2	6	3,85	3,18°	16,68	17,23	17,78	18,38	19,02	19,71	
EP01951005	2	4	2	20	65	3,2	6	3,85	2,6°	20,84	21,51	22,22	22,98	23,8	-	
EP01951101	2	6	3	12	60	4,8	6	5,85	-	-	-	-	-	-	-	

Milling | Solid carbide

EPS-CPR

Milling | Solid carbide

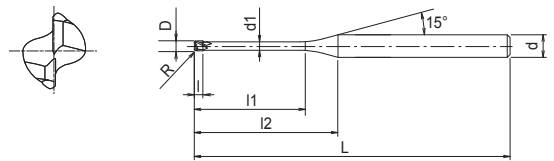

- Carbide end mill with WXS coating
- For hardened steels up to 65 HRC and stainless steels
- 2 flutes, long neck, ball nose

P ○ ~45 HRC
P ○ ~55 HRC
H ● ~60 HRC
H ● ~65 HRC

Plus line
VHM
WXS
30°
SHRINK FIT
R ± 0.005
D < 0.5 0 - 0.01
D ≥ 0.5 0 - 0.0015
P.45


EDP	Z	D	R	l1	l	l2	d	d1	L	Price
EP01960001	2	1	0,05	4	0,8	9,69	4	0,94	50	
EP01960002	2	1	0,1	4	0,8	9,69	4	0,94	50	
EP01960003	2	1	0,1	6	0,8	11,69	4	0,94	50	
EP01960004	2	1	0,2	6	0,8	11,69	4	0,94	50	
EP01960005	2	1	0,3	4	0,8	9,69	4	0,94	50	
EP01960101	2	1,5	0,2	6	1,2	10,75	4	1,43	50	
EP01960102	2	1,5	0,2	10	1,2	14,75	4	1,43	50	
EP01960103	2	1,5	0,2	16	1,2	20,75	4	1,43	50	
EP01960104	2	1,5	0,3	6	1,2	10,75	4	1,43	50	
EP01960201	2	2	0,1	8	1,6	11,82	4	1,92	50	
EP01960202	2	2	0,2	10	1,6	13,82	4	1,92	50	
EP01960203	2	2	0,2	12	1,6	15,82	4	1,92	50	
EP01960204	2	2	0,3	8	1,6	11,82	4	1,92	50	
EP01960205	2	2	0,5	8	1,6	11,82	4	1,92	50	
EP01960206	2	2	0,5	12	1,6	15,82	4	1,92	50	
EP01960301	2	3	0,2	8	2,5	13,87	6	2,85	60	
EP01960302	2	3	0,3	12	2,5	17,87	6	2,85	60	
EP01960303	2	3	0,3	16	2,5	21,87	6	2,85	60	
EP01960401	4	4	0,2	16	4	20,01	6	3,84	60	
EP01960402	4	4	0,2	20	4	24,01	6	3,84	60	
EP01960403	4	4	0,5	16	4	20,01	6	3,84	60	

Milling | Solid carbide



EPL-PC-EBD-DIA

Milling | Solid carbide

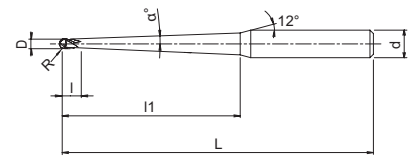

- Carbide end mills with diamond coating
- For steels and stainless steels
- 2 flutes, pencil neck, ball nose

GRAPHIT

line Plus

VHM

DIA

30°

SHRINK
FIT

R
± 0.005




EDP	Z	D	R	α	L	l	l1	d	Price
W0900961	2	1	0,5	0,9	80	3	35	6	
W0900966	2	2	1	0,9	90	6	50	6	
W0900970	2	3	1,5	0,9	100	8	60	6	
W0900976	2	4	2	0,9	130	10	80	8	
W0900977	2	4	2	0,9	160	10	110	8	
W0900982	2	6	3	0,9	160	12	100	10	
W0900983	2	6	3	0,9	220	12	150	12	
W0900986	2	8	4	0,9	170	20	100	12	
W0900987	2	8	4	0,9	220	20	150	12	



EPL-CPR-DIA

Milling | Solid carbide

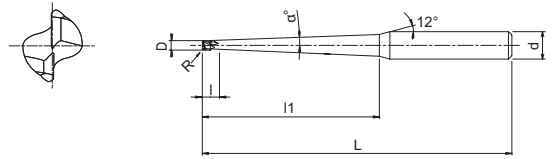

- Carbide end mills with diamond coating
- For steels and stainless steels
- 2 flutes, long neck, corner radius



EDP	Z	D	R	α	L	l	l1	d	Price
W0901016	2	4	1	0,9	130	10	80	8	
W0901017	2	4	1	0,9	160	10	110	8	
W0901025	2	6	1	0,9	160	12	100	10	
W0901026	2	6	1	0,9	220	12	150	12	
W0901031	2	8	1	0,9	170	20	100	12	
W0901032	2	8	1	0,9	220	20	150	12	

Milling | Solid carbide




KEY FEATURES: EPN-AL • EPA-AL SERIES



EPN-AL-3FS NEW

Milling | Solid carbide

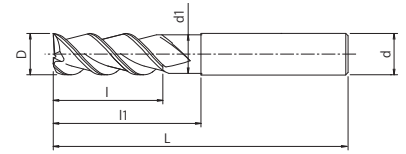

- Carbide end mill, bright finish
- For aluminium and copper alloys
- 3 flutes, short length of cut




EDP	Z	D	F	L	l1	l	d1	d	Price
EP019703	3	3	0.05 x 45°	50	7	4	2,8	6	
EP019704	3	4	0.05 x 45°	54	8	5	3,8	6	
EP019705	3	5	0.1 x 45°	54	9	6	4,8	6	
EP019706	3	6	0.1 x 45°	54	15	7	5,8	6	
EP019708	3	8	0.1 x 45°	55	17	9	7,8	8	
EP019710	3	10	0.1 x 45°	60	20	11	9,8	10	
EP019712	3	12	0.2 x 45°	70	24	12	11,8	12	
EP019716	3	16	0.2 x 45°	80	28	16	15,8	16	
EP019720	3	20	0.2 x 45°	82	32	20	19,8	20	



EPA-AL-3FS NEW

Milling | Solid carbide

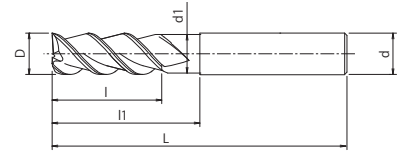

- Carbide end mill with ALC coating
- For aluminium and copper alloys
- 3 flutes, short length of cut



Milling | Solid carbide



EDP	Z	D	F	L	l1	l	d1	d	Price
EP019903	3	3	0.05 x 45°	50	7	4	2,8	6	
EP019904	3	4	0.05 x 45°	54	8	5	3,8	6	
EP019905	3	5	0.1 x 45°	54	9	6	4,8	6	
EP019906	3	6	0.1 x 45°	54	15	7	5,8	6	
EP019908	3	8	0.1 x 45°	55	17	9	7,8	8	
EP019910	3	10	0.1 x 45°	60	20	11	9,8	10	
EP019912	3	12	0.2 x 45°	70	24	12	11,8	12	
EP019916	3	16	0.2 x 45°	80	28	16	15,8	16	
EP019920	3	20	0.2 x 45°	82	32	20	19,8	20	

CUTTING CONDITIONS


Milling | Endmills | Cutting conditions

EPL-HP-4FL

Slotting

		Steels St-52 · C45 · GG-25			Hardened steels ~35 HRC 42CrMo4			Hardened steels ~45 HRC 1.2379			Stainless steel 1.4301			Titanium Ti6AlV4		
Vc		120 m/min			120 m/min			70 m/min			60 m/min			50 m/min		
Ø	Z	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
4	4	9.549	1.146	0,030	9.549	1.146	0,030	5.570	668	0,030	4.775	382	0,020	3.979	318	0,020
5	4	7.639	1.146	0,038	7.639	1.146	0,038	4.456	668	0,038	3.820	382	0,025	3.183	318	0,025
6	4	6.366	1.146	0,045	6.366	1.146	0,045	3.714	668	0,045	3.183	382	0,030	2.653	318	0,030
8	4	4.775	1.146	0,060	4.775	1.146	0,060	2.785	668	0,060	2.387	382	0,040	1.989	318	0,040
10	4	3.820	1.146	0,075	3.820	1.146	0,075	2.228	668	0,075	1.910	382	0,050	1.592	318	0,050
12	4	3.183	1.146	0,090	3.183	1.146	0,090	1.857	668	0,090	1.592	382	0,060	1.326	318	0,060
14	4	2.728	1.146	0,105	2.728	1.146	0,105	1.592	668	0,105	1.364	382	0,070	1.137	318	0,070
16	4	2.387	1.146	0,120	2.387	1.146	0,120	1.393	668	0,120	1.194	382	0,080	995	318	0,080
20	4	1.910	1.146	0,150	1.910	1.146	0,150	1.114	668	0,150	955	382	0,100	796	318	0,100

ap x d



ap	Fakt.
0,5	1,0
1,0	0,7
1,5	0,5
2,0	0,3


The above stated application data are as per **RED** marked parameters.

EPL-HP-4FL

Side milling

		Steels St-52 · C45 · GG-25			Hardened steels ~35 HRC 42CrMo4			Hardened steels ~45 HRC 1.2379			Stainless steel 1.4301			Titanium Ti6AlV4		
Vc		140 m/min			140 m/min			80 m/min			70 m/min			60 m/min		
Ø	Z	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
4	4	11.141	3.565	0,080	11.141	3.565	0,080	6.366	2.037	0,080	5.570	891	0,040	4.775	764	0,040
5	4	8.913	3.565	0,100	8.913	3.565	0,100	5.093	2.037	0,100	4.456	891	0,050	3.820	764	0,050
6	4	7.427	3.565	0,120	7.427	3.565	0,120	4.244	2.037	0,120	3.714	891	0,060	3.183	764	0,060
8	4	5.570	3.565	0,160	5.570	3.565	0,160	3.183	2.037	0,160	2.785	891	0,080	2.387	764	0,080
10	4	4.456	3.565	0,200	4.456	3.565	0,200	2.546	2.037	0,200	2.228	891	0,100	1.910	764	0,100
12	4	3.714	3.565	0,240	3.714	3.565	0,240	2.122	2.037	0,240	1.857	891	0,120	1.592	764	0,120
14	4	3.183	3.565	0,280	3.183	3.565	0,280	1.819	2.037	0,280	1.592	891	0,140	1.364	764	0,140
16	4	2.785	3.565	0,320	2.785	3.565	0,320	1.592	2.037	0,320	1.393	891	0,160	1.194	764	0,160
20	4	2.228	3.565	0,400	2.228	3.565	0,400	1.273	2.037	0,400	1.114	891	0,200	955	764	0,200

ap x d



ap	Fakt.
0,5	1,3
1,0	1,2
1,5	1,0
2,0	0,8

ae	0,2xd
----	-------

ap	Fakt.
0,5	1,2
1,0	1,0
1,5	0,7
2,0	0,5


The above stated application data are as per **RED** marked parameters.

EPL-HP-5FL

Slotting

		Steels St-52 · C45 · GG-25			Hardened steels ~35 HRC 42CrMo4			Hardened steels ~45 HRC 1.2379			Stainless steel 1.4301			Titanium Ti6AlV4		
Vc		120 m/min			120 m/min			70 m/min			60 m/min			50 m/min		
Ø	Z	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
8	5	4.775	1.432	0,060	4.775	1.432	0,060	2.785	836	0,060	2.387	477	0,040	1.989	398	0,040
10	5	3.820	1.432	0,075	3.820	1.432	0,075	2.228	836	0,075	1.910	477	0,050	1.592	398	0,050
12	5	3.183	1.432	0,090	3.183	1.432	0,090	1.857	836	0,090	1.592	477	0,060	1.326	398	0,060
16	5	2.387	1.432	0,120	2.387	1.432	0,120	1.393	836	0,120	1.194	477	0,080	995	398	0,080
20	5	1.910	1.432	0,150	1.910	1.432	0,150	1.114	836	0,150	955	477	0,100	796	398	0,100

ap x d



ap	Fakt.
0,5	1,0
1,0	0,7
1,5	0,5
2,0	0,3

The above stated application data are as per **RED** marked parameters.



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-HP-5FL

Side milling

Vc		Steels St-52 · C45 · GG-25			Hardened steels ~35 HRC 42CrMo4			Hardened steels ~45 HRC 1.2379			Stainless steel 1.4301			Titanium Ti6AlV4		
Vc		140 m/min			140 m/min			80 m/min			70 m/min			60 m/min		
Ø	Z	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
8	5	5.570	4.456	0,160	5.570	4.456	0,160	3.183	2.546	0,160	2.785	1.114	0,080	2.387	955	0,080
10	5	4.456	4.456	0,200	4.456	4.456	0,200	2.546	2.546	0,200	2.228	1.114	0,100	1.910	955	0,100
12	5	3.714	4.456	0,240	3.714	4.456	0,240	2.122	2.546	0,240	1.857	1.114	0,120	1.592	955	0,120
16	5	2.785	4.456	0,320	2.785	4.456	0,320	1.592	2.546	0,320	1.393	1.114	0,160	1.194	955	0,160
20	5	2.228	4.456	0,400	2.228	4.456	0,400	1.273	2.546	0,400	1.114	1.114	0,200	955	955	0,200

ap x d	F(fz) correction	ap	Fakt.	ap	Fakt.
		0,5	1,3	0,5	1,2
		1	1,2	1,0	1,0
		1,5	1,0	1,5	0,7
		2	0,8	2,0	0,5

Die o.g. Schnittwerte gelten für die Parameter in ROT..

EPL-ETS

Side milling

Vc		C≤0,2% - GG E24 · XC48 · GG25 750 N/mm ²			SCM - SK 350NCD16 · 40CMD8 ~30 HRC			SUS 316 · 304 800 N/mm ²			30~38 HRC Z38CDV5 · Z40CDV5 30~38 HRC			45~55 HRC Z38CDV5 45~55 HRC			55~60 HRC Z160CDV12 55~60 HRC		
Vc		100 (m/min)			80 (m/min)			60 (m/min)			60 (m/min)			60 (m/min)			30 (m/min)		
Ø	Z	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
3		10.610	859	0,027	8.488	458	0,018	6.366	267	0,014	6.366	344	0,018	6.366	210	0,011	3.183	105	0,011
4		7.958	907	0,038	6.366	477	0,025	4.775	272	0,019	4.775	358	0,025	4.775	229	0,016	2.387	107	0,015
5		6.366	955	0,050	5.093	519	0,034	3.820	298	0,026	3.820	390	0,034	3.820	241	0,021	1.910	115	0,020
6		5.305	987	0,062	4.244	547	0,043	3.183	306	0,032	3.183	411	0,043	3.183	248	0,026	1.592	119	0,025
8		3.979	883	0,074	3.183	535	0,056	2.387	272	0,038	2.387	401	0,056	2.387	222	0,031	1.194	107	0,030
10		3.183	793	0,083	2.546	519	0,068	1.910	241	0,042	1.910	390	0,068	1.910	195	0,034	955	95	0,033
12		2.653	796	0,100	2.122	497	0,078	1.592	239	0,050	1.592	372	0,078	1.592	196	0,041	796	95	0,040
16		1.989	657	0,110	1.592	525	0,110	1.194	286	0,080	1.194	394	0,110	1.194	190	0,053	597	90	0,050

Slotting

Vc		C≤0,2% - GG E24 · XC48 · GG25 750 N/mm ²			SCM - SK 350NCD16 · 40CMD8 ~30 HRC			SUS 316 · 304 800 N/mm ²			30~38 HRC Z38CDV5 · Z40CDV5 30~38 HRC			45~55 HRC Z38CDV5 45~55 HRC			55~60 HRC Z160CDV12 55~60 HRC		
Vc		80 (m/min)			65 (m/min)			50 (m/min)			55 (m/min)			45 (m/min)			20 (m/min)		
Ø	Z	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
3		8.488	688	0,027	6.897	372	0,018	5.305	223	0,014	5.836	245	0,014	4.775	158	0,011	2.122	70	0,011
4		6.366	726	0,038	5.173	388	0,025	3.979	227	0,019	4.377	249	0,019	3.581	172	0,016	1.592	72	0,015
5		5.093	764	0,05	4.138	422	0,034	3.183	248	0,026	3.501	273	0,026	2.865	180	0,021	1.273	76	0,02
6		4.244	789	0,062	3.448	445	0,043	2.653	255	0,032	2.918	280	0,032	2.387	186	0,026	1.061	80	0,025
8		3.183	707	0,074	2.586	434	0,056	1.989	233	0,039	2.188	256	0,039	1.790	167	0,031	796	72	0,03
10		2.546	672	0,088	2.069	422	0,068	1.592	224	0,047	1.751	247	0,047	1.432	146	0,034	637	63	0,033
12		2.122	637	0,1	1.724	403	0,078	1.326	215	0,054	1.459	236	0,054	1.194	147	0,041	531	64	0,04
16		1.592	573	0,12	1.293	388	0,1	995	239	0,08	1.094	263	0,08	895	142	0,053	398	60	0,05

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-HI-EMS / EPL-HI-WEMS

Ø	Carbon Steel / Allowed Steel / Tool Steel											
	~ 20 HRC				20 - 35 HRC				35 - 45 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
4	180	14.320	1.720	0,03	160	12.730	1.370	0,03	140	11.140	1.080	0,02
5	180	11.460	1.380	0,03	160	10.190	1.220	0,03	140	8.920	1.070	0,03
6	180	9.550	1.240	0,03	160	8.490	990	0,03	140	7.430	780	0,03
8	180	7.160	1.110	0,04	160	6.370	890	0,03	140	5.570	700	0,03
10	180	5.730	1.110	0,05	160	5.090	890	0,04	140	4.460	700	0,04
12	180	4.770	1.110	0,06	160	4.240	890	0,05	140	3.710	700	0,05
16	180	3.580	1.020	0,07	160	3.180	820	0,06	140	2.790	640	0,06
20	180	2.860	960	0,08	141	2.250	770	0,09	140	2.230	610	0,07

Ø	GG / GGG / GTW				INOX				Aluminium / Mg			
	Unalloyed				~ 20 HRC				Wrought alloy			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
4	145	11.540	1.300	0,03	45	3.580	310	0,02	180	14.320	1.720	0,03
5	145	9.240	1.110	0,03	45	2.870	230	0,02	180	11.460	1.380	0,03
6	145	7.690	1.100	0,04	45	2.390	230	0,02	180	9.550	1.240	0,03
8	145	5.770	1.000	0,04	45	1.790	200	0,03	180	7.160	1.110	0,04
10	145	4.620	1.000	0,05	45	1.430	200	0,03	180	5.730	1.110	0,05
12	145	3.850	1.000	0,06	45	1.190	200	0,04	180	4.770	1.110	0,06
16	145	2.880	900	0,08	45	900	190	0,05	180	3.580	1.020	0,07
20	147	2.340	800	0,09	45	720	180	0,06	180	2.860	960	0,08

EPL-HI-CR-EMS / EPL-HI-CR-WEMS

Ø	Carbon Steel / Alloyed Steel / Tool Steel									GG-GGG-GTW			INOX			Aluminium / Mg		
	~20 HRC			20 - 35 HRC			35 - 45 HRC			Unalloyed			~20HRC			Wrought Alloy		
	180 m/min			160 m/min			140 m/min			145 m/min			45 m/min			180 m/min		
	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
4	14.320	1.720	0,03	12.730	1.370	0,03	11.140	1.080	0,02	11.540	1.300	0,03	3.580	310	0,02	14.320	1.720	0,03
5	11.460	1.380	0,03	10.190	1.220	0,03	8.920	1.070	0,03	9.240	1.110	0,03	2.870	230	0,02	11.460	1.380	0,03
6	9.550	1.240	0,03	8.490	990	0,03	7.430	780	0,03	7.690	1.100	0,04	2.390	230	0,02	9.550	1.240	0,03
8	7.160	1.110	0,04	6.370	890	0,03	5.570	700	0,03	5.770	1.000	0,04	1.790	200	0,03	7.160	1.110	0,04
10	5.730	1.110	0,05	5.090	890	0,04	4.460	700	0,04	4.620	1.000	0,05	1.430	200	0,03	5.730	1.110	0,05
12	4.770	1.110	0,06	4.240	890	0,05	3.710	700	0,05	3.850	1.000	0,06	1.190	200	0,04	4.770	1.110	0,06
16	3.580	1.020	0,07	3.180	820	0,06	2.790	640	0,06	2.880	900	0,08	900	190	0,05	3.580	1.020	0,07
20	2.860	960	0,08	2.250	770	0,09	2.230	610	0,07	2.340	800	0,09	720	180	0,06	2.860	960	0,08



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-SB-EBD

High speed milling roughing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
1	120	38.220	1.530	0,02	120	38.220	1.530	0,02	110	35.030	1.400	0,02	100	31.850	1.270	0,02
2	210	33.440	2.010	0,03	210	33.440	2.010	0,03	174	27.660	1.720	0,03	160	25.480	1.530	0,03
3	290	30.790	2.960	0,05	280	29.720	2.850	0,05	250	26.540	2.550	0,05	220	23.360	2.240	0,05
4	340	27.070	3.900	0,07	330	26.270	3.780	0,07	260	20.700	2.980	0,07	230	18.310	2.640	0,07
5	380	24.200	4.360	0,09	380	24.200	4.360	0,09	300	19.110	3.440	0,09	250	15.920	2.870	0,09
6	350	18.580	4.010	0,11	400	21.230	4.590	0,11	380	20.170	4.360	0,11	380	20.170	4.360	0,11
8	350	13.930	4.240	0,15	360	14.330	4.360	0,15	350	13.930	4.240	0,15	270	10.750	3.270	0,15
10	350	11.150	4.010	0,18	300	9.550	3.440	0,18	280	8.920	3.210	0,18	250	7.960	2.870	0,18
12	350	9.290	3.570	0,19	300	7.962	3.060	0,19	280	7.430	2.850	0,19	250	6.640	2.550	0,19
16	350	6.970	3.120	0,22	300	5.970	2.680	0,22	280	5.570	2.500	0,22	250	4.980	2.230	0,22
20	350	5.570	3.120	0,28	300	4.780	2.680	0,28	280	4.460	2.500	0,28	250	3.980	2.230	0,28
ap = 0,05 - 0,07 D ae = 0,25 D				ap = 0,05 - 0,07 D ae = 0,25 D				ap = 0,04 - 0,05 D ae = 0,22 D				ap = 0,03 - 0,04 D ae = 0,20 D				

High speed milling finishing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
1	130	41.400	1.660	0,02	120	38.220	1.530	0,02	110	35.030	1.400	0,02	100	31.850	1.270	0,02
2	220	35.030	2.100	0,03	210	33.440	2.010	0,03	174	27.660	1.720	0,03	160	25.480	1.530	0,03
3	330	31.850	3.060	0,05	280	29.720	2.850	0,05	250	26.540	2.550	0,05	220	23.360	2.240	0,05
4	350	27.870	4.010	0,07	330	26.270	3.780	0,07	260	20.700	2.980	0,07	230	18.310	2.640	0,07
5	390	24.840	4.470	0,09	380	24.200	4.360	0,09	300	19.110	3.440	0,09	250	15.920	2.870	0,09
6	360	19.110	4.130	0,11	400	21.230	4.590	0,11	380	20.170	4.360	0,11	380	20.170	4.360	0,11
8	360	14.330	4.360	0,15	360	14.330	4.360	0,15	350	13.930	4.240	0,15	270	10.750	3.270	0,15
10	360	11.470	4.130	0,18	300	9.550	3.440	0,18	280	8.920	3.210	0,18	250	7.960	2.870	0,18
12	360	9.550	3.670	0,19	300	7.962	3.060	0,19	280	7.430	2.850	0,19	250	6.640	2.550	0,19
16	360	7.170	3.210	0,22	300	5.970	2.680	0,22	280	5.570	2.500	0,22	250	4.980	2.230	0,22
20	360	5.730	3.210	0,28	300	4.780	2.680	0,28	280	4.460	2.500	0,28	250	3.980	2.230	0,28
ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Conventional roughing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
1	60	19.110	760	0,02	60	19.110	760	0,02	55	17.520	700	0,02	50	15.920	640	0,02
2	105	16.720	1.000	0,03	105	16.720	1.000	0,03	90	14.330	860	0,03	80	12.740	760	0,03
3	145	15.390	1.480	0,05	140	14.860	1.430	0,05	125	13.270	1.270	0,05	110	11.680	1.120	0,05
4	170	13.540	1.950	0,07	165	13.140	1.890	0,07	130	10.350	1.490	0,07	115	9.160	1.320	0,07
5	190	12.100	2.180	0,09	190	12.100	2.180	0,09	150	9.550	1.720	0,09	125	7.960	1.430	0,09
6	175	9.290	2.010	0,11	200	10.610	2.290	0,11	190	10.090	2.180	0,11	190	10.090	2.180	0,11
8	175	6.970	2.120	0,15	180	7.170	2.180	0,15	175	6.970	2.120	0,15	135	5.370	1.630	0,15
10	175	5.570	2.010	0,18	150	4.780	1.720	0,18	140	4.460	1.610	0,18	125	3.980	1.430	0,18
12	175	4.640	1.780	0,19	150	3.980	1.530	0,19	140	3.720	1.430	0,19	125	3.320	1.270	0,19
16	175	3.480	1.560	0,22	150	2.990	1.340	0,22	140	2.790	1.250	0,22	125	2.490	1.120	0,22
20	175	2.790	1.560	0,28	150	2.390	1.340	0,28	140	2.230	1.250	0,28	125	1.990	1.120	0,28
ap = 0,05 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,05 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,04 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Conventional finishing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
1	65	20.700	830	0,02	65	20.700	830	0,02	60	19.110	760	0,02	55	17.520	700	0,02
2	110	17.520	1.050	0,03	110	17.520	1.050	0,03	95	15.130	910	0,03	85	13.540	810	0,03
3	150	15.920	1.530	0,05	145	15.390	1.480	0,05	130	13.800	1.330	0,05	115	12.210	1.170	0,05
4	175	13.930	2.010	0,07	170	13.540	1.950	0,07	135	10.750	1.550	0,07	120	9.550	1.380	0,07
5	195	12.420	2.240	0,09	195	12.420	2.240	0,09	155	9.870	1.780	0,09	130	8.280	1.490	0,09
6	180	9.550	2.060	0,11	205	10.880	2.350	0,11	195	10.350	2.240	0,11	195	10.350	2.240	0,11
8	180	7.170	2.180	0,15	185	7.360	2.240	0,15	179	7.120	2.180	0,15	140	5.570	1.690	0,15
10	180	5.730	2.060	0,18	155	4.940	1.780	0,18	145	4.620	1.660	0,18	130	4.140	1.490	0,18
12	180	4.780	1.830	0,19	155	4.110	1.580	0,19	145	3.850	1.480	0,19	130	3.450	1.330	0,19
16	180	3.580	1.610	0,22	155	3.090	1.380	0,22	145	2.890	1.290	0,22	130	2.590	1.160	0,22
20	180	2.870	1.610	0,28	155	2.470	1.380	0,28	145	2.310	1.290	0,28	130	2.070	1.160	0,28
ap = 0,02 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Milling | Solid carbide

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-SB-LN-EBD

High speed milling roughing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)
1	120	30.580	1.220	0,02	120	30.580	1.220	0,02	110	28.020	1.120	0,02	100	25.480	1.020	0,02
2	210	26.750	1.610	0,03	210	26.750	1.610	0,03	174	22.130	1.380	0,03	160	20.380	1.220	0,03
3	290	24.630	2.370	0,05	280	23.780	2.280	0,05	250	21.230	2.040	0,05	220	18.690	1.790	0,05
4	340	21.660	3.120	0,07	330	21.020	3.020	0,07	260	16.560	2.380	0,07	230	14.650	2.110	0,07
5	380	19.360	3.490	0,09	380	19.360	3.490	0,09	300	15.290	2.750	0,09	250	12.740	2.300	0,09
6	350	14.860	3.210	0,11	400	16.980	3.670	0,11	380	16.140	3.490	0,11	380	16.140	3.490	0,11
8	350	11.140	3.390	0,15	360	11.460	3.490	0,15	350	11.140	3.390	0,15	270	8.600	2.620	0,15
10	350	8.920	3.210	0,18	300	7.640	2.750	0,18	280	7.140	2.570	0,18	250	6.370	2.300	0,18
12	350	7.430	2.860	0,19	300	6.370	2.450	0,19	280	5.940	2.280	0,19	250	5.310	2.040	0,19
16	350	5.580	2.500	0,22	300	4.780	2.140	0,22	280	4.460	2.000	0,22	250	3.980	1.780	0,22
20	350	4.460	2.500	0,28	300	3.820	2.140	0,28	280	3.570	2.000	0,28	250	3.180	1.780	0,28
ap = 0,05 - 0,07 D ae = 0,25 D				ap = 0,05 - 0,07 D ae = 0,25 D				ap = 0,04 - 0,06 D ae = 0,22 D				ap = 0,02 - 0,04 D ae = 0,20 D				

High speed milling finishing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)
1	130	33.120	1.330	0,02	120	30.580	1.220	0,02	110	28.020	1.120	0,02	100	25.480	1.020	0,02
2	220	28.020	1.680	0,03	210	26.750	1.610	0,03	174	22.130	1.380	0,03	160	20.380	1.220	0,03
3	300	25.480	2.450	0,05	280	23.780	2.280	0,05	250	21.230	2.040	0,05	220	18.690	1.790	0,05
4	350	22.300	3.210	0,07	330	21.020	3.020	0,07	260	16.560	2.380	0,07	230	14.650	2.110	0,07
5	390	19.870	3.580	0,09	380	19.360	3.490	0,09	300	15.290	2.750	0,09	250	12.740	2.300	0,09
6	360	15.290	3.300	0,11	400	16.980	3.670	0,11	380	16.140	3.490	0,11	380	16.140	3.490	0,11
8	360	11.460	3.490	0,15	360	11.460	3.490	0,15	350	11.140	3.390	0,15	270	8.600	2.620	0,15
10	360	9.180	3.300	0,18	300	7.640	2.750	0,18	280	7.140	2.570	0,18	250	6.370	2.300	0,18
12	360	7.640	2.940	0,19	300	6.370	2.450	0,19	280	5.940	2.280	0,19	250	5.310	2.040	0,19
16	360	5.740	2.570	0,22	300	4.780	2.140	0,22	280	4.460	2.000	0,22	250	3.980	1.780	0,22
20	360	4.580	2.570	0,28	300	3.820	2.140	0,28	280	3.570	2.000	0,28	250	3.180	1.780	0,28
ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Conventional roughing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)
1	60	15.290	610	0,02	60	15.290	610	0,02	55	14.020	560	0,02	50	12.740	510	0,02
2	105	13.380	800	0,03	105	13.380	800	0,03	90	11.460	690	0,03	80	10.190	610	0,03
3	145	12.310	1.180	0,05	140	11.890	1.140	0,05	125	10.620	1.020	0,05	110	9.340	900	0,05
4	170	10.830	1.560	0,07	165	10.510	1.510	0,07	130	8.280	1.190	0,07	115	7.330	1.060	0,07
5	190	9.680	1.740	0,09	190	9.680	1.740	0,09	150	7.640	1.380	0,09	125	6.370	1.140	0,09
6	175	7.430	1.610	0,11	200	8.490	1.830	0,11	190	8.070	1.740	0,11	190	8.070	1.740	0,11
8	175	5.580	1.700	0,15	180	5.740	1.740	0,15	175	5.580	1.700	0,15	135	4.300	1.300	0,15
10	175	4.460	1.610	0,18	150	3.820	1.380	0,18	140	3.570	1.290	0,18	125	3.180	1.140	0,18
12	175	3.710	1.420	0,19	150	3.180	1.220	0,19	140	2.980	1.140	0,19	125	2.660	1.020	0,19
16	175	2.780	1.250	0,22	150	2.390	1.070	0,22	140	2.230	1.000	0,22	125	1.990	900	0,22
20	175	2.230	1.250	0,28	150	1.910	1.070	0,28	140	1.780	1.000	0,28	125	1.590	900	0,28
ap = 0,05 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,05 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,04 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Conventional finishing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)	Vc	S (min ⁻¹)	F (mmn/min)	fz (mm)
1	65	16.560	660	0,02	65	16.560	660	0,02	60	15.290	610	0,02	55	14.020	560	0,02
2	110	14.020	840	0,03	110	14.020	840	0,03	95	12.100	730	0,03	85	10.830	650	0,03
3	150	12.740	1.220	0,05	145	12.310	1.180	0,05	130	11.040	1.060	0,05	115	9.770	940	0,05
4	175	11.140	1.610	0,07	170	10.830	1.560	0,07	135	8.600	1.240	0,07	120	7.640	1.100	0,07
5	195	9.940	1.790	0,09	195	9.940	1.790	0,09	155	7.900	1.420	0,09	130	6.620	1.190	0,09
6	180	7.640	1.650	0,11	205	8.700	1.880	0,11	195	8.280	1.790	0,11	195	8.280	1.790	0,11
8	180	5.740	1.740	0,15	185	5.890	1.790	0,15	179	5.700	1.740	0,15	140	4.460	1.350	0,15
10	180	4.580	1.650	0,18	155	3.950	1.420	0,18	145	3.700	1.330	0,18	130	3.310	1.190	0,18
12	180	3.820	1.460	0,19	155	3.290	1.260	0,19	145	3.080	1.180	0,19	130	2.760	1.060	0,19
16	180	2.860	1.290	0,22	155	2.470	1.100	0,22	145	2.310	1.030	0,22	130	2.070	930	0,22
20	180	2.300	1.290	0,28	155	1.980	1.100	0,28	145	1.850	1.030	0,28	130	1.660	930	0,28
ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-SB-EBM

High speed milling roughing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
4	340	27.070	5.850	0,05	330	26.270	5.680	0,05	260	20.700	4.470	0,05	230	18.310	3.960	0,05
5	380	24.200	6.540	0,07	380	24.200	6.540	0,07	300	19.110	5.160	0,07	250	15.920	4.300	0,07
6	350	18.580	6.020	0,08	400	21.230	6.880	0,08	380	20.170	6.540	0,08	380	20.170	6.540	0,08
8	350	13.930	6.350	0,11	360	14.330	6.540	0,11	350	13.930	6.350	0,11	270	10.750	4.900	0,11
10	350	11.150	6.020	0,13	300	9.550	5.160	0,14	280	8.920	4.820	0,14	250	7.960	4.300	0,14
12	350	9.290	5.350	0,14	300	7.962	4.590	0,14	280	7.430	4.280	0,14	250	6.640	3.820	0,14
ap = 0,05 - 0,07 D ae = 0,25 D				ap = 0,05 - 0,07 D ae = 0,25 D				ap = 0,04 - 0,06 D ae = 0,22 D				ap = 0,02 - 0,04 D ae = 0,20 D				

High speed milling finishing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
4	350	27.870	6.020	0,05	340	27.070	5.850	0,05	270	21.500	4.640	0,05	240	19.110	4.130	0,05
5	390	24.840	6.710	0,07	390	24.840	6.710	0,07	310	19.750	5.330	0,07	260	16.560	4.470	0,07
6	360	19.110	6.190	0,08	410	21.760	7.050	0,08	390	20.700	6.710	0,08	390	20.700	6.710	0,08
8	360	14.330	6.540	0,11	370	14.730	6.720	0,11	360	14.330	6.540	0,11	280	11.150	5.080	0,11
10	360	11.470	6.190	0,13	310	9.870	5.330	0,14	290	9.240	4.990	0,14	260	8.280	4.470	0,14
12	360	9.550	5.500	0,14	310	8.230	4.740	0,14	290	7.700	4.430	0,14	260	6.900	3.980	0,14
ap = 0,02 - 0,10 D ae = 0,02 - 0,10 D				ap = 0,02 - 0,10 D ae = 0,02 - 0,10 D				ap = 0,02 - 0,10 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,10 D ae = 0,02 - 0,08 D				

Conventional roughing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
4	170	13.540	2.920	0,05	165	13.140	2.840	0,05	130	10.350	2.240	0,05	115	9.160	1.980	0,05
5	190	12.100	3.270	0,07	190	12.100	3.270	0,07	150	9.550	2.580	0,07	125	7.960	2.150	0,07
6	175	9.290	3.010	0,08	200	10.620	3.440	0,08	190	10.090	3.270	0,08	190	10.090	3.270	0,08
8	175	6.970	3.180	0,11	180	7.170	3.270	0,11	175	6.970	3.180	0,11	135	5.370	2.450	0,11
10	175	5.570	3.010	0,14	150	4.780	2.580	0,13	140	4.460	2.410	0,14	125	3.980	2.150	0,14
12	175	4.640	2.680	0,14	150	3.980	2.290	0,14	140	3.720	2.140	0,14	125	3.320	1.910	0,14
ap = 0,05 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,05 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,04 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				

Conventional finishing

Ø	25 - 30 HRC				30~38 HRC				38~45 HRC				45~55 HRC			
	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)	Vc	S (min ⁻¹)	F (mm/min)	fz (mm)
4	175	13.930	3.010	0,05	170	13.540	2.920	0,05	135	10.750	2.320	0,05	120	9.550	2.060	0,05
5	195	12.420	3.350	0,07	195	12.420	3.350	0,07	155	9.870	2.670	0,07	130	8.280	2.240	0,07
6	180	9.550	3.100	0,08	205	10.880	3.530	0,08	195	10.350	3.350	0,08	195	10.350	3.350	0,08
8	180	7.170	3.270	0,11	185	7.370	3.360	0,11	180	7.170	3.270	0,11	140	5.570	2.540	0,11
10	180	5.730	3.100	0,14	155	4.940	2.670	0,14	145	4.620	2.490	0,13	130	4.140	2.240	0,14
12	180	4.780	2.750	0,14	155	4.110	2.370	0,14	145	3.850	2.220	0,14	130	3.450	1.990	0,14
ap = 0,02 - 0,07 D ae = 0,03 - 0,10 D				ap = 0,02 - 0,07 D ae = 0,02 - 0,10 D				ap = 0,02 - 0,06 D ae = 0,02 - 0,08 D				ap = 0,02 - 0,04 D ae = 0,02 - 0,08 D				



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-WRESF

Vc	GG			C < 0,2%			SCM - SKD			25 - 35 HRC			35 - 45 HRC		
	80			70			45			35			27		
Ø	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
4	6.370	380	0,02	5.570	340	0,02	3.580	220	0,02	2.790	170	0,02	2.150	130	0,02
5	5.100	460	0,03	4.460	270	0,02	2.870	170	0,02	2.230	160	0,02	1.720	100	0,02
6	4.250	430	0,03	3.720	370	0,02	2.390	240	0,03	1.860	190	0,03	1.430	90	0,02
8	3.190	510	0,04	2.790	510	0,05	1.790	290	0,04	1.390	220	0,04	1.080	90	0,02
10	2.550	610	0,06	2.230	610	0,07	1.430	340	0,06	1.120	270	0,06	860	100	0,03
12	2.120	680	0,08	1.860	680	0,09	1.190	380	0,08	930	300	0,08	720	120	0,04
16	1.590	700	0,11	1.390	700	0,13	900	390	0,11	700	310	0,11	540	130	0,06
20	1.270	710	0,14	1.120	710	0,16	720	400	0,14	560	290	0,13	430	140	0,08
25	1.020	650	0,16	890	650	0,18	570	370	0,16	450	290	0,16	340	140	0,10

ap	ae
1D	0,5D

Vc	GG			C < 0,2%			SCM - SKD			25 - 35 HRC			35 - 45 HRC		
	65			40			35			30			20		
Ø	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)	S (min ⁻¹)	F (mm/min)	fz (mm)
4	5.180	310	0,02	3.180	190	0,02	2.790	170	0,02	2.390	140	0,02	1.590	70	0,01
5	4.140	250	0,02	2.550	150	0,02	2.230	130	0,02	1.910	110	0,02	1.270	50	0,01
6	3.450	350	0,03	2.129	210	0,02	1.860	190	0,03	1.590	160	0,03	1.060	50	0,01
8	2.590	410	0,04	1.590	250	0,04	1.390	220	0,04	1.190	190	0,04	800	70	0,02
10	2.070	500	0,06	1.270	310	0,06	1.120	270	0,06	960	230	0,06	640	60	0,02
12	1.730	550	0,08	1.060	340	0,08	930	300	0,08	800	240	0,08	530	90	0,04
16	1.290	570	0,11	800	350	0,11	700	310	0,11	600	260	0,11	400	100	0,06
20	1.040	580	0,14	640	360	0,14	560	310	0,14	480	250	0,13	320	100	0,08
25	830	530	0,16	510	330	0,16	450	290	0,16	380	250	0,16	260	100	0,10

ap	ae
1D	1D

EPL-PC-EBD-DIA

Grafit							
Ø	l1	Vc	S (min ⁻¹)	F (mm/min)	ap	ae	fz (mm)
1	35	53	16.800	320	0,05	0,10	0,01
2	50	84	13.300	500	0,10	0,20	0,02
3	60	84	8.900	510	0,15	0,30	0,03
4	130	95	7.550	580	0,20	0,40	0,04
4	160	92	7.350	560	0,2	0,4	0,04
6	160	130	6.900	700	0,30	0,60	0,05
6	220	105	5.550	640	0,30	0,60	0,06
8	170	127	5.040	770	0,40	0,80	0,08
8	220	116	4.600	700	0,4	0,8	0,08



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-LN-EBD

Standard milling

R	l1 (mm)	Cu				< 32 HRC				32 - 41 HRC				42 - 50 HRC			
		S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)
0,15	0,5	32.000	600	0,020	0,030	32.000	400	0,010	0,015	32.000	300	0,010	0,015	32.000	300	0,005	0,005
0,15	1	32.000	450	0,020	0,030	32.000	300	0,010	0,015	32.000	200	0,010	0,015	32.000	200	0,005	0,005
0,2	1	32.000	600	0,025	0,050	32.000	400	0,015	0,025	32.000	300	0,015	0,020	32.000	300	0,010	0,010
0,2	2	27.000	450	0,025	0,050	27.000	300	0,015	0,025	27.000	200	0,015	0,020	27.000	200	0,010	0,010
0,25	1	32.000	750	0,040	0,050	32.000	500	0,020	0,025	32.000	400	0,020	0,020	32.000	400	0,010	0,010
0,25	2	32.000	600	0,040	0,050	32.000	400	0,020	0,025	32.000	300	0,020	0,020	32.000	300	0,010	0,010
0,25	3	27.000	450	0,040	0,050	27.000	300	0,020	0,025	27.000	200	0,020	0,020	27.000	200	0,010	0,010
0,25	4	27.000	450	0,040	0,050	27.000	300	0,020	0,025	27.000	200	0,020	0,020	27.000	200	0,010	0,010
0,3	1	32.000	900	0,045	0,120	32.000	600	0,030	0,060	32.000	500	0,030	0,050	32.000	500	0,030	0,030
0,3	2	32.000	675	0,045	0,120	32.000	450	0,030	0,060	32.000	300	0,030	0,050	32.000	300	0,030	0,030
0,3	3	30.000	375	0,045	0,120	25.000	250	0,030	0,060	24.000	200	0,030	0,050	24.000	200	0,030	0,030
0,3	4	30.000	375	0,045	0,120	25.000	250	0,030	0,060	24.000	200	0,030	0,040	24.000	200	0,030	0,030
0,3	6	25.000	225	0,045	0,120	20.000	150	0,030	0,060	20.000	150	0,030	0,040	20.000	150	0,020	0,020
0,4	2	27.000	675	0,060	0,160	23.000	450	0,040	0,080	21.000	300	0,040	0,060	21.000	300	0,040	0,040
0,4	4	27.000	675	0,060	0,160	23.000	450	0,040	0,080	21.000	300	0,040	0,060	21.000	300	0,040	0,040
0,4	6	24.000	375	0,060	0,120	21.000	250	0,040	0,060	19.000	200	0,040	0,050	19.000	200	0,020	0,025
0,5	2,5	28.000	900	0,075	0,200	25.000	600	0,050	0,100	21.000	400	0,050	0,080	21.000	400	0,050	0,050
0,5	3	28.000	750	0,075	0,200	25.000	500	0,050	0,100	21.000	300	0,050	0,080	21.000	300	0,050	0,050
0,5	4	28.000	750	0,075	0,200	25.000	500	0,050	0,100	21.000	300	0,050	0,080	21.000	300	0,050	0,050
0,5	5	21.000	450	0,075	0,200	19.000	300	0,050	0,100	16.000	200	0,050	0,080	16.000	200	0,050	0,050
0,5	6	21.000	450	0,075	0,200	19.000	300	0,050	0,100	16.000	200	0,050	0,080	16.000	200	0,050	0,050
0,5	8	21.000	450	0,075	0,150	19.000	300	0,050	0,075	16.000	200	0,050	0,060	16.000	200	0,030	0,030
0,5	10	18.000	300	0,060	0,120	17.000	200	0,030	0,050	14.000	150	0,030	0,040	14.000	150	0,010	0,015
0,5	12	18.000	300	0,060	0,120	17.000	200	0,030	0,050	14.000	150	0,030	0,040	14.000	150	0,010	0,015
0,75	4	20.000	900	0,120	0,300	15.000	600	0,080	0,150	12.000	500	0,080	0,120	12.000	300	0,080	0,100
0,75	8	17.000	450	0,120	0,300	15.000	300	0,080	0,150	12.000	250	0,080	0,120	12.000	250	0,080	0,100
1	6	16.500	1.050	0,150	0,560	16.500	700	0,100	0,280	13.500	500	0,100	0,280	13.500	500	0,100	0,200
1	8	16.500	1.050	0,150	0,560	16.500	700	0,100	0,280	13.500	500	0,100	0,280	13.500	500	0,100	0,200
1	10	14.000	750	0,150	0,560	13.000	500	0,100	0,280	10.000	300	0,100	0,280	10.000	300	0,100	0,200
1	12	14.000	750	0,150	0,560	13.000	500	0,100	0,280	10.000	300	0,100	0,280	10.000	300	0,100	0,200
1	14	14.000	750	0,150	0,560	13.000	500	0,100	0,280	10.000	300	0,100	0,280	10.000	300	0,100	0,200
1	16	14.000	750	0,150	0,420	13.000	500	0,100	0,210	10.000	300	0,100	0,180	10.000	300	0,060	0,100
1	20	11.000	375	0,150	0,420	10.000	250	0,100	0,210	8.000	200	0,100	0,180	8.000	200	0,060	0,100
1	25	11.000	375	0,150	0,420	10.000	250	0,100	0,210	8.000	200	0,100	0,180	8.000	200	0,060	0,100
1,5	8	12.000	900	0,200	0,840	9.500	600	0,150	0,420	7.500	400	0,150	0,360	7.500	400	0,150	0,300
1,5	10	12.000	900	0,200	0,840	9.500	600	0,150	0,420	7.500	400	0,150	0,360	7.500	400	0,150	0,300
1,5	16	10.000	450	0,200	0,840	8.500	300	0,150	0,420	6.500	250	0,150	0,360	6.500	250	0,150	0,300
1,5	20	10.000	450	0,200	0,840	8.500	300	0,150	0,420	6.500	250	0,150	0,360	6.500	250	0,150	0,300
2	10	9.000	900	0,500	1,280	7.500	600	0,200	0,640	6.000	400	0,200	0,600	6.000	400	0,200	0,400
2	16	9.000	900	0,500	1,280	7.500	600	0,200	0,640	6.000	400	0,200	0,600	6.000	400	0,200	0,400
2	20	7.000	600	0,500	1,280	6.000	400	0,200	0,640	5.000	250	0,200	0,600	5.000	250	0,200	0,400
2	25	7.000	600	0,500	1,280	6.000	400	0,200	0,640	5.000	250	0,200	0,600	5.000	250	0,200	0,400
2	30	7.000	600	0,400	1,280	6.000	400	0,200	0,640	5.000	250	0,200	0,560	5.000	250	0,120	0,200
3	10	7.000	1.500	0,750	2,400	5.500	1.000	0,300	1,200	4.500	800	0,300	0,960	4.500	800	0,300	0,600
3	12	7.000	1.500	0,750	2,400	5.500	1.000	0,300	1,200	4.500	800	0,300	0,960	4.500	800	0,300	0,600
3	20	7.000	1.200	0,750	2,400	5.500	800	0,300	1,200	4.500	600	0,300	0,960	4.500	600	0,300	0,600
3	30	5.000	600	0,750	2,400	4.000	400	0,300	1,200	4.000	300	0,300	0,960	4.000	300	0,300	0,600

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-LN-EBD

High speed milling



R	l1 (mm)	Cu				< 32 HRC				32 - 41 HRC				42 - 50 HRC			
		S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)
0,15	0,5	50.000	750	0,0075	0,020	50.000	620	0,005	0,010	50.000	600	0,005	0,010	50.000	600	0,005	0,010
0,15	1	50.000	730	0,0075	0,020	50.000	600	0,005	0,010	50.000	570	0,005	0,010	50.000	570	0,005	0,010
0,2	1	50.000	1.090	0,015	0,040	50.000	900	0,020	0,010	50.000	850	0,010	0,020	50.000	850	0,010	0,020
0,2	2	50.000	850	0,015	0,040	50.000	700	0,020	0,010	50.000	660	0,010	0,020	50.000	660	0,010	0,020
0,25	1	50.000	1.420	0,0225	0,045	50.000	1.100	0,015	0,030	50.000	1.050	0,010	0,030	50.000	1.050	0,015	0,030
0,25	2	50.000	1.400	0,0225	0,045	50.000	1.000	0,015	0,030	50.000	950	0,010	0,030	50.000	950	0,015	0,030
0,25	3	50.000	1.190	0,015	0,040	48.000	900	0,010	0,020	48.000	850	0,010	0,020	48.000	850	0,010	0,020
0,25	4	45.000	1.000	0,015	0,020	43.000	600	0,010	0,010	43.000	570	0,010	0,010	43.000	570	0,010	0,010
0,3	1	50.000	1.660	0,045	0,100	50.000	1.400	0,030	0,050	50.000	1.300	0,030	0,050	50.000	1.300	0,030	0,050
0,3	2	50.000	1.600	0,045	0,100	50.000	1.300	0,030	0,050	50.000	1.200	0,030	0,050	50.000	1.200	0,030	0,050
0,3	3	50.000	1.550	0,030	0,060	50.000	1.200	0,020	0,030	50.000	1.100	0,020	0,030	50.000	1.100	0,020	0,030
0,3	4	50.000	1.200	0,015	0,040	40.000	900	0,010	0,020	40.000	850	0,010	0,020	40.000	850	0,010	0,020
0,3	6	30.000	720	0,015	0,040	26.000	600	0,010	0,020	26.000	570	0,010	0,020	25.000	540	0,010	0,020
0,4	2	50.000	2.200	0,060	0,160	50.000	2.000	0,040	0,080	50.000	1.900	0,040	0,080	50.000	1.900	0,040	0,080
0,4	4	50.000	1.680	0,060	0,160	40.000	1.200	0,040	0,080	40.000	1.100	0,040	0,080	40.000	1.100	0,040	0,080
0,4	6	32.000	1.260	0,045	0,100	30.000	800	0,030	0,050	30.000	760	0,030	0,050	30.000	760	0,030	0,050
0,5	2,5	50.000	3.270	0,075	0,200	50.000	3.400	0,050	0,100	50.000	3.200	0,050	0,100	50.000	3.200	0,050	0,100
0,5	3	50.000	3.060	0,075	0,200	45.000	3.200	0,050	0,100	45.000	3.000	0,050	0,100	45.000	3.000	0,050	0,100
0,5	4	50.000	3.000	0,075	0,200	40.000	3.000	0,050	0,100	40.000	2.850	0,050	0,100	40.000	2.850	0,050	0,100
0,5	5	47.000	2.870	0,075	0,200	36.000	2.300	0,050	0,100	36.000	2.100	0,050	0,100	36.000	2.100	0,050	0,100
0,5	6	43.000	2.600	0,075	0,200	30.000	2.000	0,050	0,100	30.000	1.900	0,050	0,100	30.000	1.900	0,050	0,100
0,5	8	27.000	2.000	0,075	0,150	26.000	1.600	0,050	0,100	26.000	1.500	0,050	0,100	26.000	1.500	0,050	0,100
0,5	10	24.000	1.400	0,015	0,040	22.000	1.100	0,010	0,020	22.000	1.000	0,010	0,020	21.000	950	0,010	0,020
0,5	12	24.000	1.400	0,015	0,040	22.000	1.100	0,010	0,020	22.000	1.000	0,010	0,020	21.000	950	0,010	0,020
0,75	4	42.000	4.110	0,150	0,300	40.000	3.900	0,075	0,150	40.000	3.700	0,075	0,150	40.000	3.700	0,075	0,1005
0,75	8	30.000	2.650	0,150	0,300	24.000	2.300	0,075	0,150	24.000	2.100	0,075	0,150	24.000	2.100	0,075	0,1005
1	6	38.000	4.000	0,200	0,400	36.000	3.000	0,100	0,200	36.000	2.800	0,100	0,200	34.000	2.600	0,100	0,200
1	8	27.000	3.360	0,200	0,400	25.000	2.600	0,100	0,200	25.000	2.400	0,100	0,200	23.000	2.200	0,100	0,200
1	10	22.000	3.050	0,200	0,400	20.000	2.400	0,100	0,200	20.000	2.200	0,100	0,200	19.000	2.000	0,100	0,200
1	12	16.000	2.580	0,200	0,400	16.000	2.000	0,100	0,200	16.000	1.900	0,100	0,200	15.000	1.700	0,100	0,200
1	14	15.000	2.400	0,200	0,300	15.000	1.800	0,100	0,200	15.000	1.700	0,100	0,200	14.000	1.500	0,100	0,200
1	16	14.000	2.200	0,200	0,200	14.000	1.700	0,100	0,100	14.000	1.600	0,100	0,100	13.000	1.400	0,100	0,100
1	20	12.000	1.200	0,100	0,200	12.000	1.200	0,050	0,100	11.000	1.100	0,050	0,100	10.000	1.000	0,100	0,100
1	25	12.000	1.200	0,100	0,200	12.000	1.200	0,050	0,100	11.000	1.100	0,050	0,100	10.000	1.000	0,100	0,100
1,5	8	32.000	4.600	0,300	0,600	30.000	4.500	0,150	0,300	30.000	4.200	0,150	0,300	25.000	3.500	0,150	0,300
1,5	10	28.000	4.000	0,300	0,600	25.000	3.800	0,150	0,300	25.000	3.600	0,150	0,300	20.000	2.800	0,150	0,300
1,5	16	20.000	2.600	0,250	0,400	16.000	2.000	0,100	0,200	16.000	1.900	0,100	0,200	13.000	1.500	0,100	0,200
1,5	20	16.000	2.200	0,250	0,400	14.000	1.800	0,100	0,200	14.000	1.700	0,100	0,200	11.000	1.300	0,100	0,200
2	10	25.000	4.500	0,400	1,000	25.000	4.500	0,200	0,500	25.000	4.200	0,200	0,500	20.000	3.300	0,200	0,500
2	16	20.000	3.460	0,400	0,600	18.000	3.200	0,200	0,500	18.000	3.000	0,200	0,500	14.000	2.300	0,200	0,500
2	20	18.000	3.000	0,400	0,500	16.000	2.800	0,200	0,400	16.000	2.600	0,200	0,400	12.000	1.900	0,200	0,400
2	25	18.000	3.000	0,250	0,600	16.000	2.800	0,100	0,300	16.000	2.600	0,100	0,300	12.000	1.900	0,100	0,300
2	30	16.000	2.850	0,250	0,400	14.000	2.400	0,100	0,200	14.000	2.200	0,100	0,200	11.000	1.700	0,100	0,200
3	10	22.000	5.900	0,750	1,250	20.000	5.400	0,300	0,500	20.000	5.000	0,300	0,500	15.000	3.750	0,300	0,500
3	12	22.000	5.900	0,750	1,250	20.000	5.400	0,300	0,500	20.000	5.000	0,300	0,500	15.000	3.750	0,300	0,500
3	20	18.000	4.400	0,750	1,250	16.000	4.200	0,300	0,500	16.000	3.900	0,300	0,500	12.000	2.900	0,300	0,500
3	30	10.000	3.200	0,600	1,25	10.000	2.600	0,300	0,500	10.000	2.400	0,300	0,500	8.000	1.900	0,300	0,500

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPS-LN-EBD

High speed milling




Vc		C≤0,2% - GG				~30 HRC				30~38 HRC			
R	l1 (mm)	120 (m/min)				110 (m/min)				100 (m/min)			
		S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)
0,15	0,6	50000	250	0,004	0,004	50000	250	0,004	0,004	50000	240	0,004	0,004
0,15	1	50000	230	0,004	0,004	50000	230	0,004	0,004	50000	220	0,004	0,004
0,15	1,5	50000	200	0,004	0,004	50000	200	0,004	0,004	50000	190	0,004	0,004
0,2	0,8	50000	360	0,005	0,005	50000	360	0,005	0,005	50000	340	0,005	0,005
0,2	1	50.000	360	0,005	0,005	50.000	360	0,005	0,005	50.000	340	0,005	0,005
0,2	1,5	45.000	300	0,005	0,005	45.000	300	0,005	0,005	45.000	280	0,005	0,005
0,2	2	38.000	230	0,005	0,005	38.000	230	0,005	0,005	38.000	210	0,005	0,005
0,25	1	50000	500	0,005	0,008	50000	500	0,005	0,008	50000	470	0,005	0,008
0,25	1,5	50000	500	0,005	0,008	50000	500	0,005	0,008	50000	470	0,005	0,008
0,25	2	50000	480	0,005	0,007	50000	480	0,005	0,007	50000	440	0,005	0,007
0,25	2,5	45000	460	0,005	0,006	45000	460	0,005	0,006	45000	420	0,005	0,006
0,25	3,5	45000	440	0,005	0,005	45000	440	0,005	0,005	45000	390	0,005	0,005
0,25	4	45000	400	0,005	0,005	45000	400	0,005	0,005	45000	360	0,005	0,005
0,25	6	40000	260	0,005	0,005	40000	260	0,005	0,005	40000	240	0,005	0,005
0,3	1,2	50.000	600	0,005	0,01	50.000	600	0,005	0,01	50.000	570	0,005	0,01
0,3	2	50.000	600	0,005	0,01	50.000	600	0,005	0,01	50.000	570	0,005	0,01
0,3	3	50.000	600	0,005	0,01	50.000	600	0,005	0,01	50.000	570	0,005	0,01
0,3	4	45.000	480	0,005	0,005	45.000	480	0,005	0,005	45.000	450	0,005	0,005
0,3	5	40.000	300	0,005	0,005	40.000	300	0,005	0,005	40.000	280	0,005	0,005
0,4	2	50.000	700	0,01	0,02	50.000	700	0,01	0,02	50.000	660	0,01	0,02
0,4	3	43.000	500	0,005	0,01	43.000	500	0,005	0,01	43.000	470	0,005	0,01
0,4	4	36.000	370	0,005	0,005	36.000	370	0,005	0,005	36.000	350	0,005	0,005
0,4	5	32.000	280	0,004	0,005	32.000	280	0,004	0,005	32.000	260	0,004	0,005
0,5	2	50.000	1.000	0,015	0,03	50.000	1.000	0,015	0,03	50.000	950	0,015	0,03
0,5	3	48.000	900	0,01	0,02	48.000	900	0,01	0,02	48.000	850	0,01	0,02
0,5	4	43.000	600	0,01	0,01	43.000	600	0,01	0,01	43.000	570	0,01	0,01
0,5	6	26.000	250	0,004	0,005	26.000	250	0,004	0,005	26.000	230	0,004	0,005
0,5	8	22.000	160	0,004	0,005	22.000	160	0,004	0,005	22.000	150	0,004	0,005
0,5	10	20.000	100	0,004	0,005	20.000	100	0,004	0,005	20.000	95	0,004	0,005
0,5	12	20000	90	0,004	0,005	20000	90	0,004	0,005	20000	80	0,004	0,005
0,75	3	45000	2400	0,04	0,08	45000	2400	0,04	0,08	45000	2200	0,04	0,08
0,75	4	42000	1900	0,04	0,08	42000	1900	0,04	0,08	42000	1700	0,04	0,08
0,75	6	28000	1400	0,04	0,08	28000	1400	0,04	0,08	28000	1150	0,04	0,08
0,75	8	24000	800	0,02	0,05	24000	800	0,02	0,05	24000	650	0,02	0,05
0,75	12	21000	680	0,008	0,01	21000	680	0,008	0,01	21000	540	0,008	0,01
1	4	40.000	3.000	0,05	0,1	40.000	3.000	0,05	0,1	40.000	2.850	0,05	0,1
1	6	30.000	2.000	0,05	0,1	30.000	2.000	0,05	0,1	30000	1900	0,05	0,1
1	8	26.000	1.600	0,05	0,1	26.000	1.600	0,05	0,1	26.000	1.500	0,05	0,1
1	10	22.000	1.100	0,01	0,02	22.000	1.100	0,01	0,02	22.000	1.000	0,01	0,02
1	12	20.000	800	0,01	0,01	20.000	800	0,01	0,01	20.000	760	0,01	0,01
1	14	18.000	600	0,005	0,01	18.000	600	0,005	0,01	18.000	570	0,005	0,01
1	16	16.000	420	0,005	0,01	16.000	420	0,005	0,01	16.000	400	0,005	0,01
1,25	10	21000	1700	0,01	0,01	21000	1700	0,01	0,01	21000	1500	0,01	0,01
1,5	6	30.000	2.900	0,075	0,15	30.000	2.900	0,075	0,15	30.000	2.700	0,075	0,15
1,5	8	24.000	2.300	0,075	0,15	24.000	2.300	0,075	0,15	24.000	2.100	0,075	0,15
1,5	10	24.000	2.000	0,075	0,15	24.000	2.000	0,075	0,15	24.000	1.900	0,075	0,15
1,5	12	21.000	1.400	0,075	0,1	21.000	1.400	0,075	0,1	21.000	1.300	0,075	0,1
1,5	15	17.000	1000	0,06	0,1	17.000	1000	0,06	0,1	17.000	940	0,06	0,1
1,5	16	16.000	800	0,05	0,1	16.000	800	0,05	0,1	16.000	760	0,05	0,1
1,5	20	13.000	360	0,02	0,05	13.000	360	0,02	0,05	13.000	340	0,02	0,05
2	8	25.000	2.600	0,1	0,2	25.000	2.600	0,1	0,2	25.000	2.400	0,1	0,2
2	10	20.000	2.400	0,1	0,2	20.000	2.400	0,1	0,2	20.000	2.200	0,1	0,2
2	12	16.000	2.000	0,1	0,2	16.000	2.000	0,1	0,2	16.000	1.900	0,1	0,2
2	16	14.000	1.700	0,1	0,1	14.000	1.700	0,1	0,1	14.000	1.600	0,1	0,1
2	20	12.000	1.200	0,05	0,1	12.000	1.200	0,05	0,1	12.000	1.100	0,05	0,1
3	12	20.000	3.000	0,15	0,3	20.000	3.000	0,15	0,3	20.000	2.800	0,15	0,3

Milling | Solid carbide



Max. Schnitttiefe



- Attention : sparks and/or flames can cause coolant fire. Be sure adequate fire prevention is available.
1. Speeds and feeds are designed to be used in conjunction with small passes on a high speed & precision machine set-up.
 2. Do not use inflammable coolant. Using worn tools may generate sparks.
 3. Use compressed air or a high quality coolant with a low co-efficient of smoke emission.
- * Modified parameters

CUTTING CONDITIONS


Milling | Endmills | Cutting conditions

EPS-LN-EBD

Milling | Endmills | Cutting conditions

Vc		38 ~ 45 HRC				45 ~ 55 HRC				55 ~ 60 HRC			
		120 (m/min)				110 (m/min)				100 (m/min)			
		R	l1 (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)	ap (mm)	pf (mm)	S (min ⁻¹)	F (mm/min)
0,15	0,6	50000	240	0,004	0,004	50000	230	0,004	0,004	50000	220	0,004	0,004
0,15	1	50000	220	0,004	0,004	50000	200	0,004	0,004	50000	180	0,004	0,004
0,15	1,5	50000	190	0,004	0,004	50000	170	0,004	0,004	50000	150	0,004	0,004
0,2	0,8	50000	340	0,005	0,005	50000	230	0,005	0,005	50000	180	0,005	0,005
0,2	1	50.000	340	0,005	0,005	50.000	230	0,005	0,005	50.000	180	0,004	0,005
0,2	1,25	47.000	300	0,005	0,005	47.000	210	0,005	0,005	43.000	150	0,004	0,005
0,2	1,5	45.000	280	0,005	0,005	45.000	190	0,005	0,005	41.000	130	0,004	0,005
0,2	2	38.000	210	0,005	0,005	37.000	140	0,005	0,005	33.000	100	0,004	0,005
0,25	1	50000	470	0,005	0,008	50000	450	0,005	0,008	50000	430	0,005	0,008
0,25	1,5	50000	470	0,005	0,008	50000	450	0,005	0,008	50000	430	0,005	0,008
0,25	2	50000	440	0,005	0,007	50000	420	0,005	0,007	50000	400	0,005	0,007
0,25	2,5	45000	420	0,005	0,006	45000	400	0,005	0,006	45000	380	0,005	0,006
0,25	3,5	45000	390	0,005	0,005	45000	370	0,005	0,005	45000	350	0,005	0,005
0,25	4	45000	360	0,005	0,005	45000	340	0,005	0,005	45000	320	0,005	0,005
0,25	6	40000	240	0,005	0,005	40000	220	0,005	0,005	40000	200	0,005	0,005
0,3	1,2	50.000	570	0,005	0,01	50.000	390	0,005	0,01	50.000	300	0,005	0,01
0,3	2	50.000	570	0,005	0,01	50.000	390	0,005	0,01	50.000	310	0,005	0,01
0,3	3	50.000	570	0,005	0,01	50.000	370	0,005	0,01	50.000	290	0,005	0,01
0,3	4	45.000	450	0,005	0,005	45.000	290	0,005	0,005	41.000	210	0,004	0,005
0,3	5	40.000	280	0,005	0,005	40.000	190	0,005	0,005	36.000	130	0,004	0,005
0,4	2	50.000	660	0,01	0,02	50.000	460	0,01	0,02	45.000	330	0,008	0,015
0,4	3	43.000	470	0,005	0,01	43.000	320	0,005	0,01	38.000	220	0,005	0,01
0,4	4	36.000	350	0,005	0,005	35.000	230	0,005	0,005	31.000	160	0,005	0,005
0,4	5	32.000	260	0,004	0,005	31.000	170	0,004	0,005	28.000	120	0,004	0,005
0,5	2	50.000	950	0,015	0,03	50.000	650	0,015	0,03	50.000	520	0,01	0,02
0,5	3	48.000	850	0,01	0,02	48.000	550	0,01	0,02	43.000	390	0,01	0,02
0,5	4	43.000	570	0,01	0,01	43.000	390	0,01	0,01	38.000	270	0,01	0,01
0,5	6	26.000	230	0,004	0,005	25.000	150	0,004	0,005	22.000	100	0,004	0,005
0,5	8	22.000	150	0,004	0,005	21.000	110	0,004	0,005	20.000	100	0,004	0,005
0,5	10	20.000	95	0,004	0,005	21.000	100	0,004	0,005	20.000	90	0,004	0,005
0,5	12	20000	80	0,004	0,005	20000	70	0,004	0,005	20000	60	0,004	0,005
0,75	3	45000	2200	0,04	0,08	45000	1800	0,04	0,08	45000	1400	0,02	0,05
0,75	4	42000	1700	0,04	0,08	42000	1400	0,04	0,08	42000	1100	0,02	0,05
0,75	6	28000	1150	0,04	0,08	28000	860	0,04	0,08	28000	660	0,02	0,05
0,75	8	24000	650	0,02	0,05	24000	580	0,02	0,05	24000	520	0,02	0,05
0,75	12	21000	540	0,008	0,01	21000	480	0,008	0,01	21000	400	0,008	0,01
1	4	40.000	2.850	0,05	0,1	40.000	2.200	0,05	0,1	40.000	1.700	0,02	0,05
1	6	30.000	1.900	0,05	0,1	30000	1.500	0,05	0,1	30000	1.200	0,02	0,05
1	8	26.000	1.500	0,05	0,1	26.000	1.200	0,05	0,1	26.000	960	0,02	0,05
1	10	22.000	1.000	0,01	0,02	21.000	760	0,01	0,02	18.000	520	0,01	0,02
1	12	20.000	760	0,01	0,01	19.000	570	0,01	0,01	17.000	400	0,01	0,01
1	14	18.000	570	0,005	0,01	17.000	430	0,005	0,01	15.000	300	0,005	0,01
1	16	16.000	400	0,005	0,01	15.000	300	0,005	0,01	13.000	200	0,005	0,01
1,25	10	21000	1500	0,05	0,01	21000	1200	0,05	0,05	21000	950	0,015	0,01
1,5	6	30.000	2.700	0,075	0,15	30.000	2.200	0,075	0,15	27.000	1.500	0,03	0,06
1,5	8	24.000	2.100	0,075	0,15	24.000	1.700	0,075	0,15	21.000	1.100	0,03	0,06
1,5	10	24.000	1.900	0,075	0,15	24.000	1.500	0,075	0,15	21.000	1.000	0,03	0,06
1,5	12	21.000	1.300	0,075	0,1	21.000	1.000	0,075	0,1	18.000	680	0,03	0,06
1,5	15	17.000	940	0,05	0,1	17.000	720	0,05	0,1	17.000	490	0,03	0,05
1,5	16	14.000	760	0,05	0,1	13.000	560	0,05	0,1	10.000	340	0,03	0,05
1,5	20	12.000	340	0,02	0,05	11.000	240	0,02	0,05	9.000	150	0,02	0,05
2	8	25.000	2.400	0,1	0,2	24.000	2.300	0,1	0,2	20.000	1.500	0,05	0,1
2	10	20.000	2.200	0,1	0,2	19.000	2.000	0,1	0,2	17.000	1.400	0,05	0,1
2	12	16.000	1.900	0,1	0,2	15.000	1.700	0,1	0,2	13.000	1.100	0,05	0,1
2	16	14.000	1.600	0,1	0,1	13.000	1.400	0,1	0,1	11.000	950	0,05	0,1
2	20	11.000	1.100	0,05	0,1	10.000	890	0,05	0,1	9.000	640	0,05	0,1
3	12	20.000	2.800	0,15	0,3	18.000	2.500	0,15	0,3	16.000	1.700	0,06	0,15

Max. Schnitttiefe



Attention : sparks and/or flames can cause coolant fire. Be sure adequate fire prevention is available.
 1. Speeds and feeds are designed to be used in conjunction with small passes on a high speed & precision machine set-up.
 2. Do not use inflammable coolant. Using worn tools may generate sparks.
 3. Use compressed air or a high quality coolant with a low co-efficient of smoke emission.
 * Modified parameters



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-CPR

Regular milling




Ø	α°	l1	max. depth of cut							< 45 HRC ap=120% ae=120%		45 - 55 HRC ap=100% ae=120%		55 - 65 HRC ap=60% ae=80%		
			R0,1		R0,2		R0,3		ap		S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
			R0,1	R0,2	R0,3	R0,5	R1	R2	ae							
1	0°	4	0,020	0,04	0,050	-	-	-	0,300	23.000	1.300	20.000	1.050	17.000	755	
1	0°	6	0,010	0,02	0,025	-	-	-	0,210	20.500	1.050	18.000	835	15.500	605	
1	0°	8	0,006	0,012	0,015	-	-	-	0,180	18.000	780	15.500	650	13.500	470	
1	0°	10	-	0,008	0,010	-	-	-	0,090	16.500	650	14.500	530	12.500	380	
2	0°	6	-	0,040	-	0,075	-	-	0,600	15.000	1680	15.000	1500	11.500	1.000	
2	0°	8	-	0,040	-	0,075	-	-	0,600	13.000	1.450	13.000	1.300	11.500	1.000	
2	0°	10	-	0,032	-	0,060	-	-	0,510	12.000	1.300	12.000	1.150	11.000	905	
2	0°	12	-	0,020	-	0,037	-	-	0,420	11.500	1.150	11.500	1.050	10.000	810	
2	0°	16	-	0,012	-	0,022	-	-	0,360	10.000	900	10.000	800	8.900	630	
2	0,9°	20	-	-	-	0,052	-	-	0,540	13.000	1.300	13.000	1.150	11.500	910	
2	0,9°	30	-	-	-	0,030	-	-	0,240	11.500	1.050	11.500	920	10.000	720	
3	0°	6	-	0,044	-	0,083	-	-	0,990	11.700	2000	10.500	1530	7.650	825	
3	0°	8	-	0,040	-	0,075	-	-	0,900	9.550	1.500	8.600	1.150	7.650	825	
3	0°	10	-	0,040	-	0,075	-	-	0,900	9.550	1.500	8.600	1.150	7.650	825	
3	0°	12	-	0,040	-	0,075	-	-	0,900	9.550	1.500	8.600	1.150	7.650	825	
3	0°	16	-	0,028	-	0,052	-	-	0,720	8.500	1.200	7.650	910	6.800	660	
3	0,9°	20	-	-	-	0,070	0,09	-	0,900	9.950	1.500	8.950	1.150	7.950	830	
3	0,9°	30	-	-	-	0,050	0,07	-	0,810	9.550	1.350	8.600	1.000	7.650	745	
3	0,9°	40	-	-	-	0,040	0,05	-	0,522	8.900	1.150	8.000	890	7.150	650	
3	1,4°	20	-	-	-	0,090	0,13	-	0,900	9.950	1.690	8.950	1.350	7.950	950	
3	1,4°	30	-	-	-	0,070	0,13	-	0,810	9.550	1.550	8.600	1.200	7.650	850	
3	1,4°	40	-	-	-	-	0,13	-	0,522	8.900	1.350	8.000	1.040	7.150	700	
4	0°	10	-	-	-	-	0,13	-	1,320	8.750	2.770	7.900	2080	5.750	1.250	
4	0°	12	-	-	-	0,075	0,12	-	1,200	8.350	2.400	7.500	1800	5.400	1.080	
4	0°	16	-	-	-	0,075	0,12	-	1,200	7.150	2.050	6.450	1.550	5.000	965	
4	0°	20	-	-	-	0,060	0,2	-	1,020	6.750	1.950	6.100	1.450	4.750	910	
4	0,9°	30	-	-	-	0,050	0,09	-	1,120	7.550	1.500	7.150	1.300	6.400	950	
4	0,9°	40	-	-	-	0,040	0,09	-	0,900	7.200	1.350	6.750	1.150	5.950	850	
4	0,9°	50	-	-	-	0,030	0,07	-	0,810	7.150	1.300	6.600	1.050	5.800	750	
4	0,9°	60	-	-	-	-	0,05	-	0,522	6.800	1.150	6.400	950	5.600	700	
4	1,4°	30	-	-	-	0,070	0,13	-	1,120	7.550	1.500	7.150	1.300	6.400	950	
4	1,4°	40	-	-	-	0,060	0,13	-	0,900	7.200	1.400	6.750	1.150	5.950	850	
6	0°	12	-	-	-	0,083	0,13	-	1,980	6.130	2.900	5.550	2200	3.850	900	
6	0°	16	-	-	-	0,075	0,12	-	1,800	5.000	2.170	4.540	1630	3.600	800	
6	0°	20	-	-	-	0,075	0,12	-	1,800	5.000	2.170	4.540	1630	3.350	700	
6	0°	25	-	-	-	0,075	0,12	-	1,800	5.000	2.170	4.540	1630	3.180	650	
6	0,9°	50	-	-	-	0,030	0,13	-	1,680	5.300	1.100	5.050	950	4.250	700	
6	0,9°	60	-	-	-	0,030	0,09	-	1,200	5.150	1.030	4.900	900	3.950	600	
6	0,9°	70	-	-	-	0,020	0,07	-	1,200	4.950	950	4.750	800	3.800	550	
6	0,9°	80	-	-	-	-	0,07	-	1,020	4.750	850	4.500	720	3.750	500	
8	0,9°	60	-	-	-	0,070	0,13	-	2,160	4.350	950	4.000	800	3.800	650	
8	0,9°	80	-	-	-	0,050	0,09	0,2	1,920	4.150	830	3.800	700	3.550	550	

Offset



Ecken-Radius R (mm)	roughness (µm)												
	0,10	0,25	0,75	1,00	1,25	1,50	1,75	2,00	2,50	3,00	3,25	4,00	5,00
R 0,1	0,009	0,014	0,024	0,028	0,032	0,035	0,037	0,040	0,045	0,049	-	-	-
R 0,2	0,012	0,020	0,035	0,040	0,045	0,049	0,053	0,057	0,063	0,070	0,075	0,080	0,900
R 0,3	0,015	0,025	0,042	0,049	0,055	0,060	0,065	0,070	0,077	0,085	0,092	0,098	0,110
R 0,5	0,020	0,032	0,055	0,065	0,070	0,078	0,084	0,090	0,100	0,110	0,118	0,125	0,141
R 1	0,028	0,045	0,078	0,090	0,100	0,110	0,111	0,125	0,142	0,155	0,168	0,180	0,200



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-CPR

Side milling (Contour line finish)




			 max. depth of cut							< 45 HRC ap=120% ae=120%		45 - 55 HRC ap=100% ae=120%		55 - 65 HRC ap=60% ae=80%	
D	α°	l1	R0,1	R0,2	R0,3	ap R0,5	R1	R2	ae	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)
1	0°	4	0,015	0,020	0,03	-	-	-	0,030	27.000	1.500	24.500	1.250	22.500	995
1	0°	6	0,015	0,020	0,03	-	-	-	0,027	24.000	1.200	21.500	1.000	20.000	800
1	0°	8	0,009	0,012	0,018	-	-	-	0,021	21.000	950	19.000	790	17.500	620
1	0°	10	-	0,008	0,012	-	-	-	0,015	19.500	770	17.500	640	16.500	505
2	0°	6	-	0,020	-	0,05	-	-	0,060	16.500	1850	16.000	1.600	15.000	1.350
2	0°	8	-	0,020	-	0,05	-	-	0,060	16.500	1.850	16.000	1.600	15.000	1.350
2	0°	10	-	0,020	-	0,05	-	-	0,060	15.500	1.650	15.500	1.450	14.500	1.200
2	0°	12	-	0,020	-	0,05	-	-	0,054	14.500	1.500	14.500	1.300	13.500	1.050
2	0°	16	-	0,012	-	0,03	-	-	0,042	13.000	1.150	12.500	1.000	12.000	830
2	0,9°	20	0,050	-	-	-	-	-	0,060	16.500	1.650	16.000	1.450	15.000	1.200
2	0,9°	30	0,040	-	-	-	-	-	0,048	14.500	1.300	14.500	1.150	13.500	950
3	0°	6	-	0,020	-	0,05	-	-	0,080	12.600	2.100	11.400	1.500	10.000	1.100
3	0°	8	-	0,020	-	0,05	-	-	0,080	12.000	2.000	11.000	1.400	10.000	1.100
3	0°	10	-	0,020	-	0,05	-	-	0,080	12.000	2.000	11.000	1.400	10.000	1.100
3	0°	12	-	0,020	-	0,05	-	-	0,080	12.000	2.000	11.000	1.400	10.000	1.100
3	0°	16	-	0,020	-	0,05	-	-	0,080	10.500	1.600	9.600	1.150	9.000	875
3	0,9°	20	0,050	0,090	-	-	-	-	0,080	12.500	2.000	11.500	1.450	10.500	1.100
3	0,9°	30	0,050	0,070	-	-	-	-	0,080	12.000	1.800	11.000	1.300	10.000	985
3	0,9°	40	0,045	0,070	-	-	-	-	0,064	11.000	1.550	10.000	1.100	9.450	860
3	1,4°	20	0,090	0,130	-	-	-	-	0,080	12.500	2.250	11.500	1.750	10.500	1.250
3	1,4°	30	0,070	0,130	-	-	-	-	0,080	12.000	2.050	11.000	1.550	10.000	1.100
3	1,4°	40	-	0,130	-	-	-	-	0,064	11.000	1.750	10.000	1.300	9.450	950
4	0°	10	-	-	-	-	0,08	-	0,080	8.300	2.700	7.550	2.200	7.600	1.650
4	0°	12	-	-	-	0,08	0,08	-	0,080	7.900	2.500	7.150	2.050	7.200	1.550
4	0°	16	-	-	-	-	0,08	-	0,080	7.900	2.500	7.150	2.050	6.450	1.450
4	0°	20	-	-	-	0,05	0,08	-	0,080	7.450	2.400	6.750	1.950	6.100	1.350
4	0,9°	30	-	-	-	0,050	0,090	-	0,106	9.950	1.900	9.150	1.450	8.350	1.100
4	0,9°	40	-	-	-	0,040	0,090	-	0,106	9.600	1.750	8.800	1.350	8.050	1.000
4	0,9°	50	-	-	-	0,030	0,070	-	0,085	9.500	1.600	8.500	1.200	7.750	850
4	0,9°	60	-	-	-	-	0,050	-	0,085	9.150	1.450	8.350	1.100	7.550	750
4	1,4°	30	-	-	-	0,070	0,130	-	0,106	9.950	2.100	9.150	1.650	8.350	1.100
4	1,4°	40	-	-	-	0,060	0,130	-	0,106	9.600	1.950	8.800	1.500	8.050	950
6	0°	12	-	-	-	0,05	0,08	-	0,100	5.500	2.650	5.050	2.150	5.050	1.800
6	0°	16	-	-	-	0,05	0,08	-	0,100	5.250	2.500	4.750	2.050	4.750	1.750
6	0°	20	-	-	-	0,05	0,08	-	0,100	5.250	2.500	4.750	2.050	4.500	1.750
6	0°	25	-	-	-	0,05	0,08	-	0,100	4.950	2.350	4.500	1.950	4.250	1.600
6	0,9°	50	-	-	-	0,030	0,130	-	0,130	7.450	1.700	6.900	1.400	6.350	950
6	0,9°	60	-	-	-	0,030	0,090	-	0,130	7.200	1.600	6.700	1.300	6.150	850
6	0,9°	70	-	-	-	0,020	0,070	-	0,130	7.050	1.500	6.500	1.200	5.900	750
6	0,9°	80	-	-	-	-	0,070	-	0,100	6.900	1.400	6.350	1.100	5.850	700
8	0,9°	60	-	-	-	0,070	0,130	-	0,192	6.350	1.550	5.950	1.250	5.550	900
8	0,9°	80	-	-	-	0,050	0,090	0,2	0,160	5.950	1.300	5.550	1.050	5.150	

Offset



Ecken- radius R (mm)	roughness (µm)													
	0,10	0,25	0,75	1,00	1,25	1,50	1,75	2,00	2,50	3,00	3,25	4,00	5,00	
R 0,1	0,009	0,014	0,024	0,028	0,032	0,035	0,037	0,040	0,045	0,049	-	-	-	
R 0,2	0,012	0,020	0,035	0,040	0,045	0,049	0,053	0,057	0,063	0,070	0,075	0,080	0,900	
R 0,3	0,015	0,025	0,042	0,049	0,055	0,060	0,065	0,070	0,077	0,085	0,092	0,098	0,110	
R 0,5	0,020	0,032	0,055	0,065	0,070	0,078	0,084	0,090	0,100	0,110	0,118	0,125	0,141	
R 1	0,028	0,045	0,078	0,090	0,100	0,110	0,111	0,125	0,142	0,155	0,168	0,180	0,200	



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPL-CPR-DIA



Grafit							
Ø	l1	Vc	S (min-1)	F (mm/min)	ap	ae	fz (mm)
4	80	75	6.000	840	0,75	1,60	0,07
4	110	50	4.000	560	0,75	1,60	0,07
6	100	75	4.000	720	1,10	3,20	0,09
6	150	57	3.000	540	1,10	3,20	0,09
8	100	101	4.000	760	1,50	4,80	0,10
8	150	75	3.000	570	1,50	4,80	0,10

EPS-CPR


Side milling (Contour line finish)



Max. cutting depth a_p										~ 45 HRC Hardened steels		45 ~ 55 HRC Hardened steels		55 ~ 65 HRC Hardened steels		
Ø	α°	l1 (mm)	ap							ae	ap = 120%	ae = 120%	ap = 100%	ae = 100%	ap = 60%	ae = 80%
			R0,05	R0,1	R0,2	R0,3	R0,5	R1	S (min ⁻¹)		F (mm/min)	S (min ⁻¹)	F (mm/min)	S (min ⁻¹)	F (mm/min)	
1	0°	4	0,006	0,015	0,02	0,03	-	-	0,030	27.000	1.500	24.500	1.250	22.500	995	
1	0°	6	0,006	0,015	0,02	0,03	-	-	0,027	24.000	1.200	21.500	1.000	20.000	800	
1,5	0°	6	-	-	0,02	0,03	-	-	0,045	21.000	1.750	18.500	1.450	16.000	1.050	
1,5	0°	10	-	-	0,018	0,027	-	-	0,036	17.500	1.250	15.500	1.050	13.500	760	
1,5	0°	16	-	-	0,008	0,012	-	-	0,022	11.000	640	10.000	530	8.650	390	
2	0°	8	-	0,015	0,02	0,03	0,05	-	0,060	16.500	1.850	16.000	1.600	15.000	1.350	
2	0°	10	-	0,015	0,02	0,03	0,05	-	0,060	15.500	1.650	15.500	1.450	14.500	1.200	
2	0°	12	-	0,015	0,02	0,03	0,05	-	0,054	14.500	1.500	14.500	1.300	13.500	1.050	
3	0°	8	-	-	0,02	-	-	-	0,080	12.000	2.000	11.000	1.400	10.000	1.100	
3	0°	12	-	-	0,02	0,03	0,05	-	0,080	12.000	2.000	11.000	1.400	10.000	1.100	
3	0°	16	-	-	0,02	0,03	0,05	-	0,080	10.500	1.600	9.600	1.150	9.000	875	
4	0°	16	-	-	0,02	0,03	0,05	0,08	0,080	7.900	2.500	7.150	2.050	6.450	1.450	
4	0°	20	-	-	0,02	0,03	0,05	0,08	0,080	7.450	2.400	6.750	1.950	6.100	1.350	

Offset

R	0,1	0,25	0,5	0,75	1	1,25	1,5	1,75	2	2,5	3	3,5	4	5
R0,05	0,006	0,01	0,014	0,017	0,02	0,022	0,024	0,026	0,028	-	-	-	-	-
R0,1	0,009	0,014	0,02	0,024	0,028	0,032	0,035	0,037	0,04	0,045	0,049	-	-	-
R0,2	0,012	0,02	0,028	0,035	0,04	0,045	0,049	0,053	0,057	0,063	0,07	0,075	0,08	0,9
R0,3	0,015	0,025	0,035	0,042	0,049	0,055	0,06	0,065	0,07	0,077	0,085	0,092	0,098	0,11
R0,5	0,02	0,032	0,045	0,055	0,065	0,07	0,078	0,084	0,09	0,1	0,11	0,118	0,125	0,141
R1	0,028	0,045	0,063	0,078	0,09	0,1	0,11	0,118	0,125	0,142	0,155	0,168	0,18	0,2




CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

EPN-AL-3FS/FL


Side milling

	Aluminium wrought alloys	Aluminium cast alloy >5% Si <10% Si
	Vc	400 - 600 (m/min)
Ø	fz (mm)	fz (mm)
3	0,027	0,024
4	0,036	0,032
5	0,045	0,041
6	0,054	0,049
8	0,072	0,065
10	0,090	0,081
12	0,108	0,097
16	0,144	0,130
20	0,195	0,175

ae max. 60% x D ap = 1xD

EPN-AL-3FS/FL


Slotting

	Aluminium wrought alloys	Aluminium cast alloy >5% Si <10% Si
	Vc	400 - 600 (m/min)
Ø	fz (mm)	fz (mm)
3	0,019	0,017
4	0,025	0,022
5	0,032	0,029
6	0,038	0,034
8	0,050	0,046
10	0,063	0,057
12	0,076	0,068
16	0,101	0,091
20	0,137	0,123

ap = 1xD

EPA-AL-3FS/FL


Side milling

	Aluminium wrought alloys	Aluminium cast alloy >5% Si <10% Si
	Vc	500 - 800 (m/min)
Ø	fz (mm)	fz (mm)
3	0,027	0,024
4	0,036	0,032
5	0,045	0,041
6	0,054	0,049
8	0,072	0,065
10	0,090	0,081
12	0,108	0,097
16	0,144	0,130
20	0,195	0,175

ae max. 60% x D ap = 1xD

EPA-AL-3FS/FL

Slotting

	Aluminium wrought alloys	Aluminium cast alloy >5% Si <10% Si
	Vc	500 - 800 (m/min)
Ø	fz (mm)	fz (mm)
3	0,019	0,017
4	0,025	0,022
5	0,032	0,029
6	0,038	0,034
8	0,050	0,046
10	0,063	0,057
12	0,076	0,068
16	0,101	0,091
20	0,137	0,123




ap = 1xD

Milling | Solid carbide



TOLERANCE OF THE RADIUS

TYPE	TOLERANCE
EPL-CPR	+/- 0.005mm
EPL-LN-EBD	+/- 0.005mm
EPS-CPR	+/- 0.005mm
EPS-LN-EBD	+/- 0.005mm

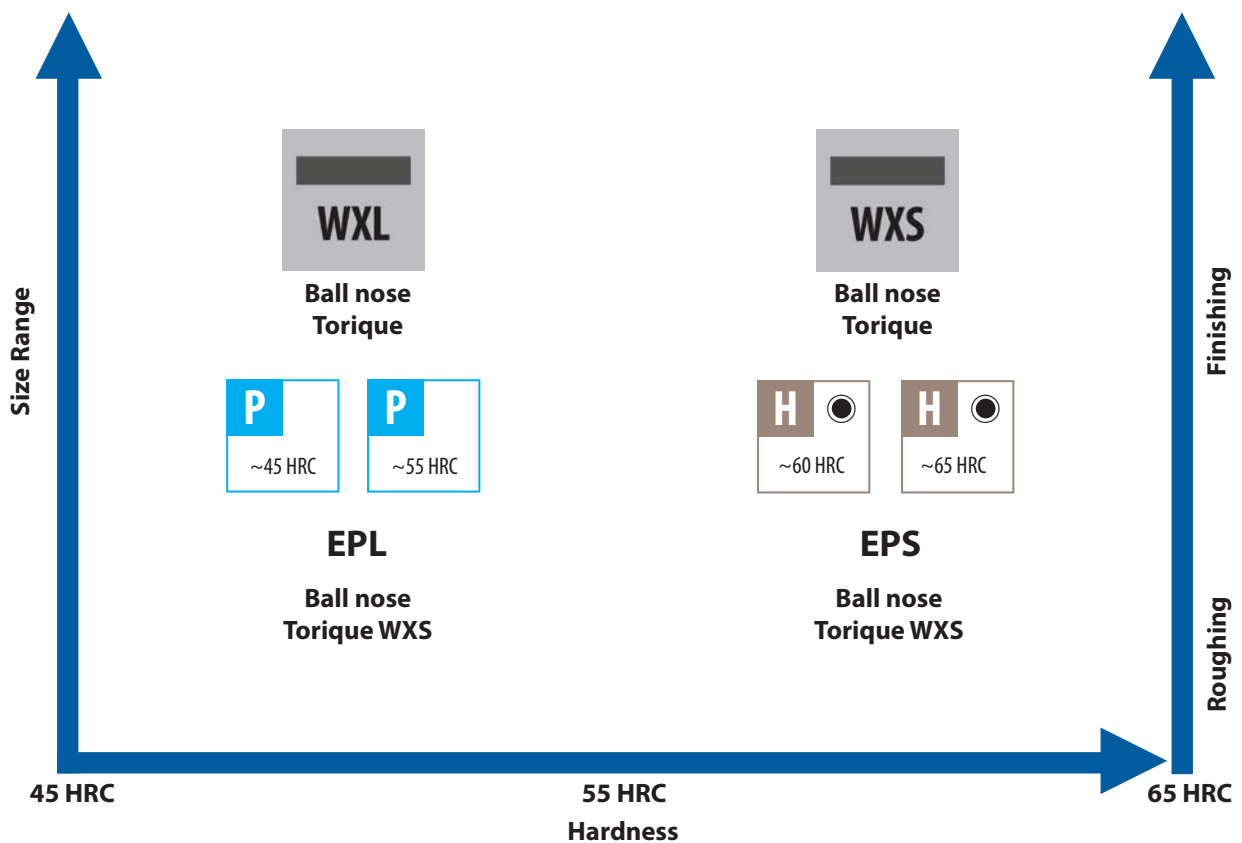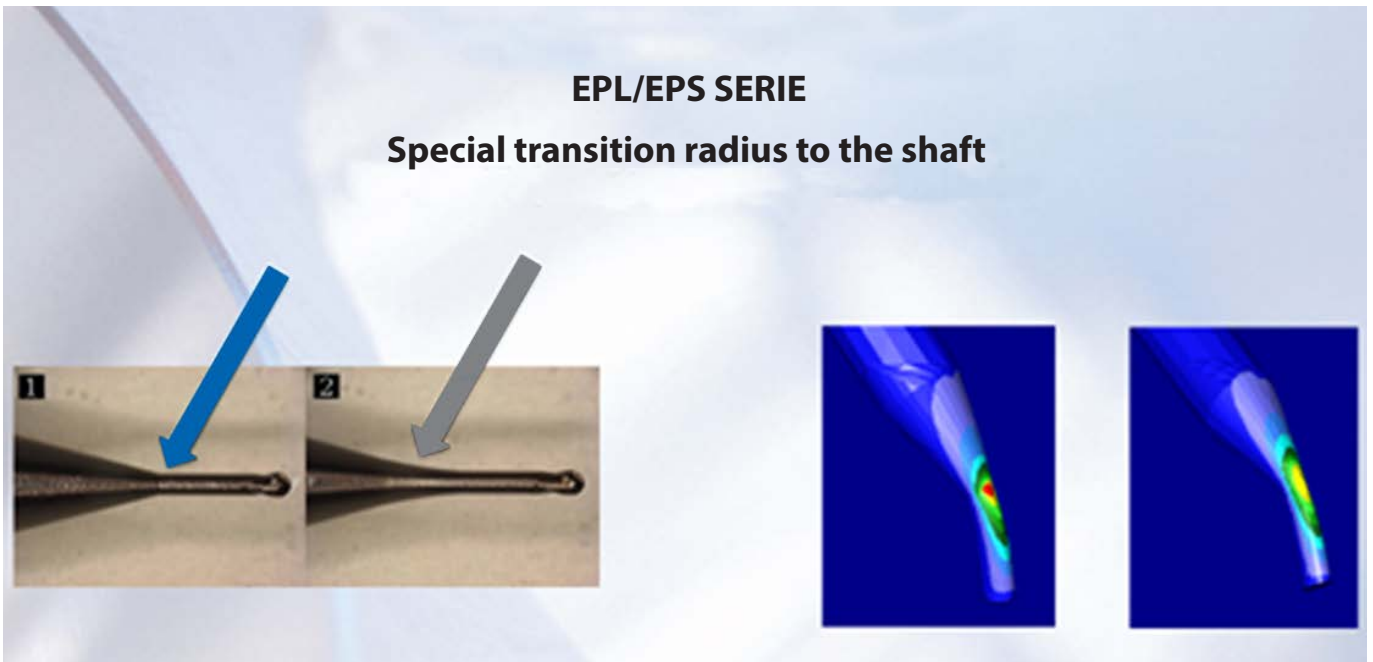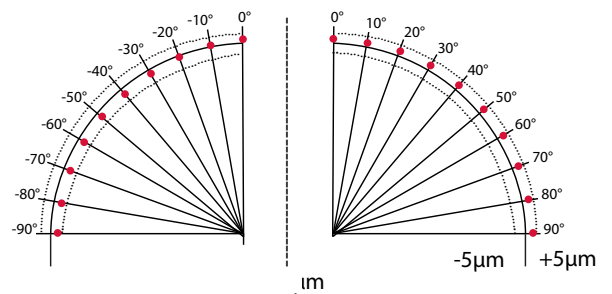

Milling | Solid carbide





shaping your dreams

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 07
Fax: +32 10 23 05 51
info@osgeurope.com

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 11
Fax: +32 10 23 05 31
info@osg-belgium.com

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte - France
Tel: +33 1 49 90 10 10
Fax: +33 1 49 90 10 15
sales@osg-france.com

OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen
Tel: +31 348 44 2764
Fax: +31 348 44 2144
info@osg-nl.com

OSG UK

Shelton house, 5 Bentalls
Pipps Hill Ind Est, Basildon Essex SS14 3BY
Tel: +44 1268 567 660
Fax: +44 1268 567 661
sales@osg-uk.com

CZECH, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.
Slovakia organizacna zlozka
Racianská 22/A, SK-83102 Bratislava
Slovakia
Tel. +421 24 32 91 295
Orders-osgsvk@osgeurope.com

OSG POLAND Sp. z.o.o.

Spółdzielcza 57
05-074 Halinów - Poland
Tel: +22 760 82 71
Fax: +22 760 82 71
osg@osg-poland.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen - Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde - Denmark
Tel: +45 46 75 65 55
Fax: +45 46 75 67 00
osg@osg-scandinavia.com

SWEDEN

Branch office of OSG SCANDINAVIA
Abrahams Gränd 8
295 35 Bromölla - Sweden
Tel: +46 40 41 22 55
Fax: +46 40 41 32 55
osg@osg-scandinavia.com

OSG IBERICA

Bekolarra 4
E - 01010 Vitoria-Gasteiz - Spain
Tel: +34 945 242 400
Fax: +34 945 228 883
osg.iberica@osg-ib.com

RUSSIA

Butlerova street, 17B, office 5069
117342 Moscow - Russia
Tel: +7 (495) 150 41 54
info@osg-russia.com

OSG TURKEY

Rami Kişla Cad.No:56 Eyüp
Istanbul 34056 - Turkey
Tel:+90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

ROMSAN INTERNATIONAL CO. SRL

Reprezentant Exclusiv OSG
25C, Bucuresti-Magurele Street
051431 Bucuresti - România
Tel: +40 21 322 07 47
Fax: +40 21 321 56 00
romsan.int@romsan.ro

AUSTRIA

Branch office of OSG GERMANY
Messestraße 11
A-6850 Dornbirn
Tel: +49 7161 6064-0
Fax: +49 7161 6064-444
info@osg-germany.de

OSG ITALIA

Via Ferrero, 65 A/B
I - 10098 Rivoli - Italy
Tel: +39 0117705211
Fax: +39 0117705215
info@osg-italia.it

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
T +41 44 802 15 15
F +41 44 802 15 95
info@vb-tools.com

OSG EUROPE LOGISTICS S.A.

08/2020 - All rights reserved. © OSG Europe 2020

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

www.osgeurope.com